







KENWOOD

REGULATED DC POWER SUPPLY

PR18-1.2A PR18-3A
PR18-5A PR36-1.2A
PR36-3A PR70-1A

SERVICE MANUAL

KENWOOD CORPORATION

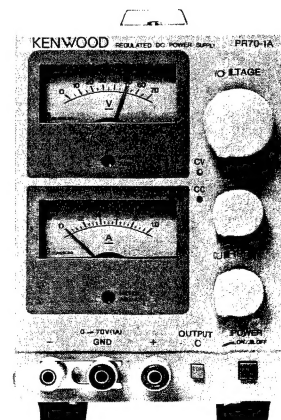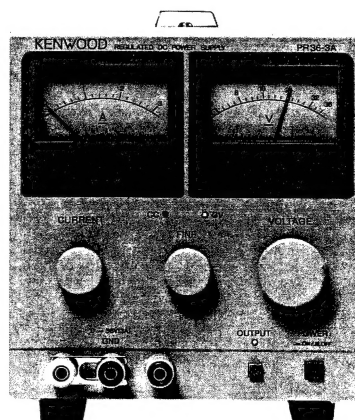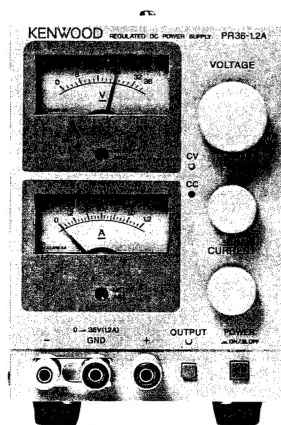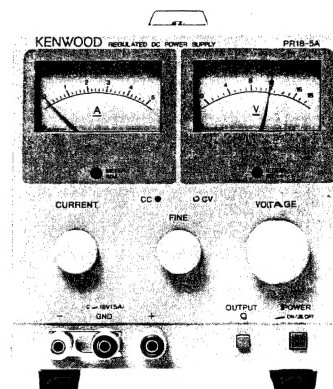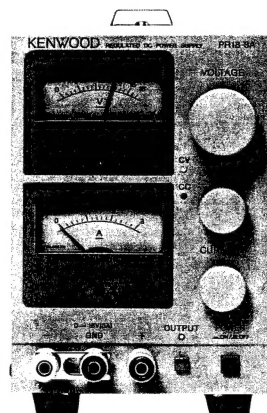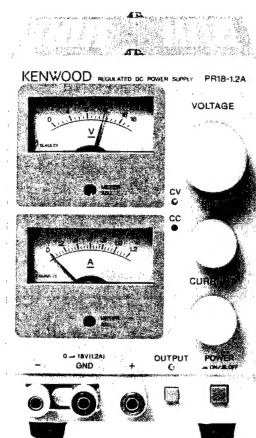

ADJUSTMENT

To obtain the best performance, periodically calibrate the unit. Sometimes, only one mode need be calibrated, while at other times, all modes should be calibrated. When one mode is calibrated, it must be noted that the other modes may be affected. When calibrating all modes, perform the calibration in the specified sequence.

The following calibration required an accurate measuring instrument and an insulated adjusting flat blade screwdriver. If they are not available, contact your dealer. For optimum adjustment, turn the power on and warm up the scope sufficiently (more than 30 minutes) before starting. Before calibrating the scope, check the power supply voltage.

TEST EQUIPMENT REQUIRED

The following instrument or their equivalent should be used for making adjustment.

Multimeter 45 FLUKE

PREPARATION FOR ADJUSTMENT

Control Settings

The control settings listed below must be used for each adjustment procedure.

Exceptions to these settings will be noted as they occur. After completing a adjustment, return the controls to the following settings.

NAME OF KNOBS	POSITION
CURRENT FINE VOLTAGE	Fully Clockwise

Item	Adjustment VR	Procedure	Refer to Table 1.
Voltage	VR1 (V. ADJ)	Turn VR1 clockwise to adjust the to the output voltage setting, then turn the FINE control to adjust to the rated voltage. (Before this adjustment, set VR1 to VR3 to the fully counterclockwise positions.)	
Current	VR2 (A. ADJ)	Connect a load and turn VR2 to adjust to the output current setting.	
A meter	VR3 (AM. CAL)	Set the load for the rated current, and adjust the swing of the ammeter of the main unit with VR3.	

Specifications Model	Output voltage setting [V]	Output current setting [A]
PR18-1.2A	18.5	1.28
PR18-3A		3.19
PR18-5A		5.3
PR36-1.2A	37	1.28
PR36-3A		3.19
PR70-1A	72	1.06

Table 1

PARTS LIST

PR18-1.2A Y86-1850-00

REF. NO	PARTS NO	NAME & DESCRIPTION
	A01-1236-08	COVER
	A63-0112-08	FRONT PANEL
	B31-0755-08	METER;VOLT
	B31-0756-08	METER;CURRENT
	B40-2737-24	SERIAL NO. PLATE
	B42-3731-08	MASTER/SLAVE LABEL
	B42-3734-08	RATING:AC100V 50/60HZ 45W
	B42-3735-08	FUSE RATING LABEL
	B42-3749-08	RATING:AC120V 50/60HZ 45W
	B42-3750-08	RATING:AC220V 50/60HZ 45W
	B42-3751-08	RATING:AC240V 50/60HZ 45W
	B42-3752-08	RATING:AC120V 60HZ 45W
	B63-0173-00	INSTRUCTION MANUAL;JAPANESE
	B63-0174-00	INSTRUCTION MANUAL;ENGLISH
	E21-0670-03	TERMINAL,RED
	E21-0671-03	TERMINAL,BLACK
	E21-0672-03	TERMINAL,WHITE
	E29-0506-04	SHORTING BAR
	E29-0542-08	LUG;M3
	E30-0027-35	UL/CSA POWER CORD
	E30-0545-05	JIS POWER CORD
	E30-0571-15	SAA POWER CORD
	E30-1815-05	CEE POWER CORD
	E30-1867-05	BS POWER CORD
	F01-0884-08	HEAT SINK
	F05-8013-08	FUSE(5X20MM) 0.8A/250V
	F05-8015-08	FUSE(6X32MM) 0.8A/250V
	F29-0515-08	INSULATOR;FOR Q6
	F51-0007-08	FUSE 1.5A/125V
	H10-2853-08	FOAMED STYRENE PAD (FRONT)
	H10-2854-08	FOAMED STYRENE PAD (REAR)
	H10-2855-08	STYRENE PAD;83X115X30MM
	H10-2858-08	STYRENE PAD;154X205X30MM
	H20-1734-08	VINYL COVER
	H53-0111-08	CARTON BOX
	J02-0529-08	FOOT
	J19-1671-08	CLAMPER;FOR 2-CORE AC CORD
	J19-1672-08	CLAMPER;FOR 3-CORE AC CORD
	J21-4720-08	BRACKET;FOR P.C.B
	J21-4758-08	BRACKET;FOR AC CORD BUSHING
	J30-0635-08	VOLUME SPACER;FOR VR01
	J42-0083-05	BUSHING;FOR 2-CORE AC CORD
	J42-0085-05	BUSHING;FOR 3-CORE AC CORD
	K21-0907-14	KNOB
	K21-0911-04	KNOB;FINE/CURRENT
	K24-3006-04	KNOB,OUTPUT
	K27-0509-04	PUSH BUTTON,ORANGE;POWER
	L07-1516-08	POWER TRANSFORMER
	N09-0718-05	SCREW,SEMS PAN HD M3X6
	N09-0720-05	SCREW,SEMS PAN HD M4X10
	N09-0757-05	SCREW,SEMS BINDING TAPTITE 3X6
	N09-0789-05	SCREW,SEMS PAN HD M3X10
	N09-0797-08	SCREW,SEMS TAPTITE 3X10
	N14-0404-04	FLANGE NUT M3
	N89-3006-41	SCREW,BINDING TAPTITE 3X6
	N89-3010-41	SCREW,BINDING TAPTITE 3X10
	S40-2533-08	PUSH SWITCH;POWER
	W02-2267-08	AMP UNIT
VR01	R29-3503-08	VOLUME 10K
VR02	R39-0800-08	VOLUME 1K
VR03	R29-3504-08	VOLUME 10K

PR18-1.2A AMP UNIT W02-2267-08

REF. NO	PARTS NO	NAME & DESCRIPTION
	E21-0674-08	EXTERNAL OUTPUT TERMINAL
	E40-7141-08	PIN CONNECTOR 2P(LINE VOLTAGE)
	E40-7142-08	PIN CONNECTOR 1P(LINE VOLTAGE)
	J13-0518-08	FUSE CLIP;FOR 6X30MM
	J73-0326-08	PCB (UNMOUNTED)
	R92-0150-05	JUMPING RES. ZERO OHM(10MM)
	R92-1061-05	JUMPING RES. ZERO OHM(5MM)
C1	C90-3023-08	CAP. ELECTRO 470 105°C 35V
C2	CQ92M1H102K	CAP. NYLAR 1000P 10% 50V
C3	C91-2559-08	CAP. CERAMIC 0.1 0.25P 50V
C4	CQ92M1H472K	CAP. NYLAR 4700P 10% 50V
C5	CQ92M1H103K	CAP. NYLAR 0.01 10% 50V
C6	NO USE	
C7	C90-3020-08	CAP. ELECTRO 100 105°C 25V
C8	CF93AN2ER22K	CAP. POLYESTER 0.22P 10% 250V
C9	NO USE	
C10	C90-3021-08	CAP. ELECTRO 2200 105°C 35V
C11	CF93AN1JR22K	CAP. POLYESTER 0.22P 10% 63V
C22	C91-2559-08	CAP. CERAMIC 0.1 0.25P 50V
C26	C90-3174-08	CAP. ELECTRO 10 1% 50V
C27	NO USE	
C28	C90-3020-08	CAP. ELECTRO 100 105°C 25V
C29	C91-2559-08	CAP. CERAMIC 0.1 0.25P 50V
C32	CF93AN1J1R0K	CAP. POLYESTER 1P 10% 63V
CN1	E40-7218-08	PIN CONNECTOR 2P
CN2	E40-7344-08	PIN CONNECTOR 3P
CN3	NO USE	
CN4	E40-7126-08	PIN CONNECTOR 2P
CN5	E40-7219-08	PIN CONNECTOR 3P
CN6	NO USE	
CN7	E40-7229-08	PIN CONNECTOR 4P
CN11	E40-7332-08	PIN CONNECTOR 4P
CN12	E40-7333-08	PIN CONNECTOR 2P
CN13	E40-7333-08	PIN CONNECTOR 2P
CN18	E40-7440-08	CONNECTOR
CN23	E40-3240-05	PIN CONNECTOR 5P
CN24	E40-7333-08	PIN CONNECTOR 2P
C01	C90-3018-08	CAP. ELECTRO 1 105°C 50V
C01	C91-1323-08	CAP. CERAMIC 0.1 20% 250V
C02	NO USE	
C03	C90-3046-08	CAP. ELECTRO 100 105°C 50V
D1	1B4H42	DIODE,STACK
D2	ERA15-01	DIODE
D3	1SS270A	DIODE
D4	1SS270A	DIODE
D5	1SS270A	DIODE
D6	1SS270A	DIODE
D7	1SS270A	DIODE
D8	NO USE	
D9	D3SB60	DIODE,STACK
D14	1SS270A	DIODE
D15	1SS270A	DIODE
D16	1SS270A	DIODE
D28	1SS270A	DIODE
D33	ERA15-01	DIODE
D34	1SS270A	DIODE
D37	ERA15-01	DIODE
D38	1SS270A	DIODE
D39	ERA15-01	DIODE
D01	ERA15-01	DIODE
IC1	UPC151C	IC,OP AMP
IC2	UPC151C	IC,OP AMP
IC3	UPC1093J	IC,VARIABLE SHUNT REGULATOR
IC9	HA178L12A	IC,TERMINAL FIXED VOLTAGE REG.
LED1	LN222RP	LED;RED
LED2	LN322GP	LED;GREEN
LED01	LN222RP	LED;RED
Q1	2SC1815(GR)	TR. SI, NPN
Q2	2SC1815(GR)	TR. SI, NPN
Q3	2SC1815(GR)	TR. SI, NPN
Q4	2SC1815(GR)	TR. SI, NPN

PARTS LIST

REF. NO	PARTS NO	NAME & DESCRIPTION
Q5	2SC1815(GR)	TR. SI, NPN
Q6	2SD1148(O)	TR. SI, NPN
Q7	NO USE	
Q8	2SC3421(Y)	TR. SI, NPN
Q15	2SC1815(GR)	TR. SI, NPN
Q16	NO USE	
Q17	DTA143EF	TR. DIGITAL
R1	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R2	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R2	RD14DB2H302J	RES. CARBON 3K 5% 1/2W
R3	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R4	RD14BB2C510J	RES. CARBON 51 5% 1/6W
R5	RD14BB2C682J	RES. CARBON 6.8K 5% 1/6W
R6	RD14BB2C273J	RES. CARBON 27K 5% 1/6W
R7	RN14BK2C5101F	RES. METAL FILM 5.1K 1% 1/6W
R8	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R9	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R10	RD14BB2C472J	RES. CARBON 4.7K 5% 1/6W
R11	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R12	NO USE	
R13	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R14	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R15	RD14BB2C511J	RES. CARBON 510 5% 1/6W
R16	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W
R17	NO USE	
R18	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R19	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R20	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R21	RN14BK2C1603F	RES. METAL FILM 160K 1% 1/6W
R22	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R23	RN14BK2C9101F	RES. METAL FILM 9.1K 1% 1/6W
R24	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
R27	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R28	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R29	RS14GB3D152J	RES. METAL FILM 1.5K 5% 2W
R40	RN14BK2C1800F	RES. METAL FILM 180 1% 1/6W
R44	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R45	RD14DB2H202J	RES. CARBON 2K 5% 1/2W
R67	RS14GB3DR43J	RES. METAL FILM 0.43 5% 2W
R74	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R75	RD14DB2H202J	RES. CARBON 2K 5% 1/2W
R76	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R77	NO USE	
R78	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R79	RD14DB2H102J	RES. CARBON 1K 5% 1/2W
R85	RD14DB2H101J	RES. CARBON 100 5% 1/2W
R88	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R89	NO USE	
R90	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R91	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R92	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R93	RD14BB2C205J	RES. CARBON 2K 5% 1/6W
R94	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R95	NO USE	
R96	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R01	RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W
RY1	S76-0604-08	RELAY
RY2	NO USE	
RY3	S76-0604-08	RELAY
RY4	S76-0630-08	RELAY
SW1	S68-0631-05	OUTPUT SW
SW2	S31-1512-08	MASTER/SLAVE SWITCH
VR1	R12-1565-08	RES. SEMI FIXED 2KB
VR2	R12-3568-08	RES. SEMI FIXED 30KB
VR3	R12-0597-08	RES. SEMI FIXED 100
ZD1	HZ56A	DIODE, ZENER 5.75V

PR18-3A

Y86-1860-00

REF. NO	PARTS NO	NAME & DESCRIPTION
	A01-1237-08	CASE
	A63-0113-08	FRONT PANEL
	B31-0754-08	METER: CURRENT
	B31-0755-08	METER: VOLT
	B40-2737-24	SERIAL NO. PLATE
	B42-3731-08	MASTER/SLAVE LABEL
	B42-3733-08	FUSE RATING LABEL
	B42-6035-08	RATING: AC100V 50/60HZ 100W
	B42-6036-08	RATING: AC120V 50/60HZ 100W
	B42-6037-08	RATING: AC220V 50/60HZ 100W
	B42-6038-08	RATING: AC240V 50/60HZ 100W
	B42-6039-08	RATING: AC120V 60HZ 100W
	B63-0173-00	INSTRUCTION MANUAL: JAPANESE
	B63-0174-00	INSTRUCTION MANUAL: ENGLISH
	E21-0670-03	TERMINAL, RED
	E21-0671-03	TERMINAL, BLACK
	E21-0672-03	TERMINAL, WHITE
	E29-0506-04	SHORTING BAR
	E29-0542-08	LUG: N3
	E30-0027-35	UL/CSA POWER CORD
	E30-0545-05	JIS POWER CORD
	E30-0571-15	SAA POWER CORD
	E30-1815-05	CEE POWER CORD
	E30-1867-05	BS POWER CORD
	F01-0885-08	HEAT SINK
	F05-2021-08	FUSE(5X20MM) 2A/250V
	F05-2023-05	FUSE(6X32MM) 2A/250V
	F29-0515-08	INSULATOR: FOR Q6
	F29-0517-08	INSULATOR: FOR Q6/Q11
	F51-0009-08	FUSE(6X30MM) 3A/125V
	H10-2853-08	FOAMED STYRENE PAD (FRONT)
	H10-2854-08	FOAMED STYRENE PAD (REAR)
	H20-1734-08	VINYL COVER
	H53-0112-08	CARTON BOX
	J02-0529-08	FOOT
	J19-1671-08	CLAMPER: FOR 2-CORE AC CORD
	J19-1672-08	CLAMPER: FOR 3-CORE AC CORD
	J21-4720-08	BRACKET: FOR P.C.B
	J21-4758-08	BRACKET: FOR AC CORD BUSHING
	J29-0519-08	BRACKET: FOR P.C.B
	J30-0635-08	VOLUME SPACER: FOR VR01
	J42-0083-05	BUSHING: FOR 2-CORE AC CORD
	J42-0085-05	BUSHING: FOR 3-CORE AC CORD
	K01-0417-05	HANDLE
	K21-0907-14	KNOB
	K21-0911-04	KNOB: FINE/CURRENT
	K24-3006-04	KNOB: OUTPUT
	K27-0509-04	PUSH BUTTON, ORANGE: POWER
	L07-1517-08	POWER TRANSFORMER
	N09-0718-05	SCREW, SEMS PAN HD M3X6
	N09-0757-05	SCREW, SEMS BINDING TAPTITE 3X6
	N09-0776-05	SCREW, SEMS PAN HD M3X10
	N09-0777-05	SCREW, SEMS PAN HD M4X6
	N09-0789-05	SCREW, SEMS PAN HD M3X10
	N09-0797-08	SCREW, SEMS TAPTITE 3X10
	N14-0404-04	FLANGE NUT M3
	N89-3006-41	SCREW, BINDING TAPTITE 3X6
	N89-3012-41	SCREW, BINDING TAPTITE 3X12
	S40-2533-08	PUSH SWITCH: POWER
	M02-2268-08	AMP UNIT
VR01	R29-3503-08	VOLUME 10K
VR02	R29-1508-08	VOLUME 1K
VR03	R29-3504-08	VOLUME 10K

PARTS LIST

PR18-3A AMP UNIT

W02-2268-08

REF. NO	PARTS NO	NAME & DESCRIPTION
	E21-0674-08	EXTERNAL OUTPUT TERMINAL
	E40-7141-08	PIN CONNECTOR 2P(LINE VOLTAGE)
	E40-7142-08	PIN CONNECTOR 1P(LINE VOLTAGE)
	J13-0518-08	FUSE CLIP: FOR 6X30MM
	R92-0150-05	JUMPING RES. ZERO OHM (10MM)
	R92-1061-05	JUMPING RES. ZERO OHM (5MM)
C1	C90-3019-08	CAP. ELECTRO 1000 105°C 35V
C2	CQ92M1H102K	CAP. MYLAR 1000P 10% 50V
C3	C91-2559-08	CAP. CERAMIC 0.1 0.25P 50V
C4	CQ92M1H472K	CAP. MYLAR 4700P 10% 50V
C5	CQ92M1H103K	CAP. MYLAR 0.01 10% 50V
C6	NO USE	
C7	C90-3020-08	CAP. ELECTRO 100 105°C 25V
C8	CF93AN2ER22K	CAP. POLYESTER 0.22P 10% 250V
C9	NO USE	
C10	C90-3021-08	CAP. ELECTRO 2200 105°C 35V
C11	CF93AN1JR22K	CAP. POLYESTER 0.22P 10% 63V
C22	C91-2559-08	CAP. CERAMIC 0.1 0.25P 50V
C26	C90-3174-08	CAP. ELECTRO 10 1% 50V
C27	NO USE	
C28	C90-3020-08	CAP. ELECTRO 100 105°C 25V
C29	C91-2559-08	CAP. CERAMIC 0.1 0.25P 50V
C32	CF93AN1J1R0K	CAP. POLYESTER 1P 10% 63V
CN1	E40-7218-08	PIN CONNECTOR 2P
CN2	E40-7344-08	PIN CONNECTOR 3P
CN3	NO USE	
CN4	E40-7126-08	PIN CONNECTOR 2P
CN5	E40-7219-08	PIN CONNECTOR 3P
CN6	E40-7219-08	PIN CONNECTOR 3P
CN7	E40-7229-08	PIN CONNECTOR 4P
CN8	E40-7229-08	PIN CONNECTOR 4P
CN11	E40-7332-08	PIN CONNECTOR 4P
CN12	E40-7333-08	PIN CONNECTOR 2P
CN13	E40-7333-08	PIN CONNECTOR 2P
CN18	E40-7440-08	CONNECTOR
CN23	E40-3240-05	PIN CONNECTOR 5P
CN24	E40-7333-08	PIN CONNECTOR 2P
C01	C90-3018-08	CAP. ELECTRO 1 105°C 50V
C01	C91-1323-08	CAP. CERAMIC 0.1 20% 250V
C02	NO USE	
C03	C90-3046-08	CAP. ELECTRO 100 105°C 50V
D1	1B4B42	DIODE STACK
D2	ERA15-01	DIODE
D3	1SS270A	DIODE
D4	1SS270A	DIODE
D5	1SS270A	DIODE
D6	1SS270A	DIODE
D7	1SS270A	DIODE
D8	NO USE	
D9	D10XB40	DIODE STACK
D10	ERA15-01	DIODE
D14	1SS270A	DIODE
D15	1SS270A	DIODE
D16	1SS270A	DIODE
D28	1SS270A	DIODE
D33	ERA15-01	DIODE
D34	1SS270A	DIODE
D37	ERA15-01	DIODE
D38	1SS270A	DIODE
D39	ERA15-01	DIODE
D01	30D1	DIODE
IC1	UPC151C	IC, OP AMP
IC2	UPC151C	IC, OP AMP
IC3	UPC1093J	IC, VARIABLE SHUNT REGULATOR
IC9	HA178L12A	IC, TERMINAL FIXED VOLTAGE REG.
LED1	LN222NP	LED: RED
LED2	LN322GP	LED: GREEN
LED0	LN222RP	LED: RED
LED01	LN222RP	LED: RED
Q1	2SC1815(GR)	TR. SI, NPN
Q2	2SC1815(GR)	TR. SI, NPN
Q3	2SC1815(GR)	TR. SI, NPN

REF. NO	PARTS NO	NAME & DESCRIPTION
Q4	2SC1815(GR)	TR. SI, NPN
Q5	2SC1815(GR)	TR. SI, NPN
Q6	2SD1148(O)	TR. SI, NPN
Q7	2SC2238(Y)	TR. SI, NPN
Q8	2SC3421(Y)	TR. SI, NPN
Q9	2SC1815(GR)	TR. SI, NPN
Q10	2SC1815(GR)	TR. SI, NPN
Q15	2SC1815(GR)	TR. SI, NPN
Q16	NO USE	
Q17	DTA143EF	TR. DIGITAL
Q11A	2SD1148(O)	TR. SI, NPN
Q11B	2SD1148(O)	TR. SI, NPN
R1	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R2	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R2	RD14BB2H302J	RES. CARBON 3K 5% 1/2W
R3	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R4	RD14BB2C510J	RES. CARBON 51 5% 1/6W
R5	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R6	RD14BB2C273J	RES. CARBON 27K 5% 1/6W
R7	RN14BK2C5101F	RES. METAL FILM 5.1K 1% 1/6W
R8	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R9	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R10	RD14BB2C511J	RES. CARBON 510 5% 1/6W
R11	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R12	NO USE	
R13	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R14	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R15	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R16	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W
R17	NO USE	
R18	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R19	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R20	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R21	RN14BK2C3303F	RES. METAL FILM 330K 1% 1/6W
R22	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R23	RN14BK2C9101F	RES. METAL FILM 9.1K 1% 1/6W
R24	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
R27	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R28	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R29	RS14GB3D152J	RES. METAL FILM 1.5K 5% 2W
R30	RS14GB3AR33J	RES. METAL FILM 0.33 5% 1W
R34	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R35	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R36	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R37	RD14BB2C510J	RES. CARBON 51 5% 1/6W
R38	RD14BB2C133J	RES. CARBON 13K 5% 1/6W
R39	RD14BB2C273J	RES. CARBON 27K 5% 1/6W
R40	RN14BK2C51R0F	RES. METAL FILM 51.0 1% 1/6W
R43	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R44	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R45	RD14BB2H202J	RES. CARBON 2K 5% 1/2W
R67	RS14GB3DR15J	RES. METAL FILM 0.15 5% 2W
R74	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R75	RD14BB2H202J	RES. CARBON 2K 5% 1/2W
R76	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R77	NO USE	
R78	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R79	RD14BB2H102J	RES. CARBON 1K 5% 1/2W
R85	RD14BB2H101J	RES. CARBON 100 5% 1/2W
R88	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R89	NO USE	
R90	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R91	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R92	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R93	RD14BB2C205J	RES. CARBON 2M 5% 1/6W
R94	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R95	NO USE	
R96	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R32A	RS14GB3AR33J	RES. METAL FILM 0.33 5% 1W
R32B	RS14GB3AR33J	RES. METAL FILM 0.33 5% 1W
R01	RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W
RY1	S76-0604-08	RELAY
RY2	S76-0604-08	RELAY
RY3	S76-0604-08	RELAY
RY4	S76-0630-08	RELAY
SW1	S68-0631-05	OUTPUT SW
SW2	S31-1512-08	MASTER/SLAVE SWITCH
VR1	R12-1565-08	RES. SEMI FIXED 2KB
VR2	R12-5547-08	RES. SEMI FIXED 100KB
VR3	R12-0597-08	RES. SEMI FIXED 100
ZD1	HZS6A	DIODE, ZENER 5.75V

PARTS LIST

PR18-5A Y86-1870-00

REF. NO	PARTS NO	NAME & DESCRIPTION
	A01-1238-08	COVER
	A63-0114-08	FRONT PANEL
	B31-0757-08	METER; VOLT
	B31-0758-08	METER; CURRENT
	B40-2737-24	SERIAL NO. PLATE
	B42-3731-08	MASTER/SLAVE LABEL
	B42-3738-08	FUSE RATING LABEL
	B42-6055-08	RATING: AC100V 50/60HZ 165W
	B42-6056-08	RATING: AC120V 50/60HZ 165W
	B42-6057-08	RATING: AC220V 50/60HZ 165W
	B42-6058-08	RATING: AC240V 50/60HZ 165W
	B42-6059-08	RATING: AC120V 60HZ 165W
	B63-0173-00	INSTRUCTION MANUAL: JAPANESE
	B63-0174-00	INSTRUCTION MANUAL: ENGLISH
	E21-0670-03	TERMINAL, RED
	E21-0671-03	TERMINAL, BLACK
	E21-0672-03	TERMINAL, WHITE
	E29-0506-04	SHORTING BAR
	E29-0542-08	LUG; M3
	E30-0027-35	UL/CSA POWER CORD
	E30-0545-05	JIS POWER CORD
	E30-0571-15	SAA POWER CORD
	E30-1815-05	CEE POWER CORD
	E30-1867-05	BS POWER CORD
	F01-0886-08	HEAT SINK
	F05-3022-05	FUSE(6X32MM) 3A/250V
	F29-0517-08	INSULATOR; FOR Q6/Q11
	F29-0518-08	INSULATOR; FOR Q11A/Q11B/Q11C
	F50-0004-08	FUSE(5X20MM) 3A/250V
	F51-0010-08	FUSE(6X30MM) 5A/125V
	H10-2856-08	FOAMED STYRENE PAD (FRONT)
	H10-2857-08	FOAMED STYRENE PAD (REAR)
	H20-1734-08	VINYL COVER
	H53-0113-08	CARTON BOX
	J02-0529-08	FOOT
	J19-1671-08	CLAMPER; FOR 2-CORE AC CORD
	J19-1672-08	CLAMPER; FOR 3-CORE AC CORD
	J21-4720-08	BRACKET; FOR P.C.B
	J21-4758-08	BRACKET; FOR AC CORD BUSHING
	J30-0635-08	VOLUME SPACER; FOR VR01
	J42-0083-05	BUSHING; FOR 2-CORE AC CORD
	J42-0085-05	BUSHING; FOR 3-CORE AC CORD
	K01-0417-05	HANDLE
	K21-0907-14	KNOB
	K21-0911-04	KNOB; FINE/CURRENT
	K24-3006-04	KNOB; OUTPUT
	K27-0509-04	PUSH BUTTON, ORANGE; POWER
	L07-1518-08	POWER TRANSFORMER
	N09-0718-05	SCREW, SEMS PAN HD M3X6
	N09-0757-05	SCREW, SEMS BINDING TAPTITE 3X6
	N09-0776-05	SCREW, SEMS PAN HD M3X10
	N09-0777-05	SCREW, SEMS PAN HD M4X6
	N09-0789-05	SCREW, SEMS PAN HD M3X10
	N09-0797-08	SCREW, SEMS TAPTITE 3X10
	N14-0404-04	FLANGE NUT M3
	N89-3006-41	SCREW, BINDING TAPTITE 3X6
	N89-3012-41	SCREW, BINDING TAPTITE 3X12
	S40-2533-08	PUSH SWITCH; POWER
	W02-2269-08	AMP UNIT
VR01	R29-3503-08	VOLUME 10K
VR02	R29-1508-08	VOLUME 1K
VR03	R29-3504-08	VOLUME 10K

PR18-5A AMP UNIT W02-2269-08

REF. NO	PARTS NO	NAME & DESCRIPTION
	E21-0674-08	EXTERNAL OUTPUT TERMINAL
	E40-7141-08	PIN CONNECTOR 2P(LINE VOLTAGE)
	E40-7142-08	PIN CONNECTOR 1P(LINE VOLTAGE)
	J13-0518-08	FUSE CLIP; FOR 6X30MM
	J73-0326-08	PCB (UNMOUNTED)
	R92-0150-05	JUMPING RES. ZERO OHM(10MM)
	R92-1061-05	JUMPING RES. ZERO OHM(5MM)
C1	C90-3019-08	CAP. ELECTRO 1000 105°C 35V
C2	C992M1H102K	CAP. MYLAR 1000P 10% 50V
C3	C91-2559-08	CAP. CERAMIC 0.1 0.25P 50V
C4	C992M1H472K	CAP. MYLAR 4700P 10% 50V
C5	C992M1H103K	CAP. MYLAR 0.01 10% 50V
C6	NO USE	
C7	C90-3020-08	CAP. ELECTRO 100 105°C 25V
C8	CF93AN2ER22K	CAP. POLYESTER 0.22P 10% 250V
C9	NO USE	
C10	C90-3024-08	CAP. ELECTRO 3300 105°C 35V
C11	CF93AN1JR22K	CAP. POLYESTER 0.22P 10% 63V
C22	C91-2559-08	CAP. CERAMIC 0.1 0.25P 50V
C26	C90-3174-08	CAP. ELECTRO 10 1% 50V
C27	NO USE	
C28	C90-3020-08	CAP. ELECTRO 100 105°C 25V
C29	C91-2559-08	CAP. CERAMIC 0.1 0.25P 50V
C32	CF93AN1JR0K	CAP. POLYESTER 1P 10% 63V
CN1	E40-7218-08	PIN CONNECTOR 2P
CN2	E40-7344-08	PIN CONNECTOR 3P
CN3	NO USE	
CN4	E40-7126-08	PIN CONNECTOR 2P
CN5	E40-7219-08	PIN CONNECTOR 3P
CN6	E40-7219-08	PIN CONNECTOR 3P
CN7	E40-7229-08	PIN CONNECTOR 4P
CN8	E40-7229-08	PIN CONNECTOR 4P
CN11	E40-7332-08	PIN CONNECTOR 4P
CN12	E40-7333-08	PIN CONNECTOR 2P
CN13	E40-7333-08	PIN CONNECTOR 2P
CN18	E40-7440-08	CONNECTOR
CN23	E40-3240-05	PIN CONNECTOR 5P
CN24	E40-7333-08	PIN CONNECTOR 2P
C01	C90-3018-08	CAP. ELECTRO 1 105°C 50V
C01	C91-1323-08	CAP. CERAMIC 0.1 20% 250V
C02	NO USE	
C03	C90-3046-08	CAP. ELECTRO 100 105°C 50V
D1	1B4B42	DIODE, STACK
D2	ERA15-01	DIODE
D3	1SS270A	DIODE
D4	1SS270A	DIODE
D5	1SS270A	DIODE
D6	1SS270A	DIODE
D7	1SS270A	DIODE
D8	NO USE	
D9	D15XB40	DIODE, STACK
D10	ERA15-01	DIODE
D14	1SS270A	DIODE
D15	1SS270A	DIODE
D16	1SS270A	DIODE
D28	1SS270A	DIODE
D33	ERA15-01	DIODE
D34	1SS270A	DIODE
D37	ERA15-01	DIODE
D38	1SS270A	DIODE
D39	ERA15-01	DIODE
D01	30D1	DIODE
IC1	UPC151C	IC, OP AMP
IC2	UPC151C	IC, OP AMP
IC3	UPC1093J	IC, VARIABLE SHUNT REGULATOR
IC9	HA178L12A	IC, TERMINAL FIXED VOLTAGE REG.
LED1	LN322GP	LED; GREEN
LED2	LN222RP	LED; RED
LED0	LN222RP	LED; RED
LED01	LN222RP	LED; RED
Q1	2SC1815(GR)	TR. SI, NPN
Q2	2SC1815(GR)	TR. SI, NPN
Q3	2SC1815(GR)	TR. SI, NPN

PARTS LIST

W02-2269-08

REF. NO	PARTS NO	NAME & DESCRIPTION
Q4	2SC1815 (GR)	TR. SI, NPN
Q5	2SC1815 (GR)	TR. SI, NPN
Q6	2SD1148 (O)	TR. SI, NPN
Q7	2SC2238 (Y)	TR. SI, NPN
Q8	2SC3421 (Y)	TR. SI, NPN
Q9	2SC1815 (GR)	TR. SI, NPN
Q10	2SC1815 (GR)	TR. SI, NPN
Q11	2SD1148 (O)	TR. SI, NPN
Q15	2SC1815 (GR)	TR. SI, NPN
Q16	NO USE	
Q17	DTA143EF	TR. DIGITAL
Q11A	2SD1148 (O)	TR. SI, NPN
Q11B	2SD1148 (O)	TR. SI, NPN
Q11C	2SD1148 (O)	TR. SI, NPN
R1	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R2	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R2	RD14DB2H302J	RES. CARBON 3K 5% 1/2W
R3	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R4	RD14BB2C510J	RES. CARBON 51 5% 1/6W
R5	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R6	RD14BB2C273J	RES. CARBON 27K 5% 1/6W
R7	RN14BK2C5101F	RES. METAL FILM 5.1K 1% 1/6W
R8	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R9	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R10	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R11	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R12	NO USE	
R13	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R14	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R15	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R16	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W
R17	NO USE	
R18	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R19	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R20	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R21	RN14BK2C3303F	RES. METAL FILM 330K 1% 1/6W
R22	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R23	RN14BK2C9101F	RES. METAL FILM 9.1K 1% 1/6W
R24	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
R27	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R28	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R29	RS14GB3D152J	RES. METAL FILM 1.5K 5% 2W
R30	RS14GB3AR33J	RES. METAL FILM 0.33 5% 1W
R31	NO USE	
R32	RS14GB3AR33J	RES. METAL FILM 0.33 5% 1W
R33	NO USE	
R34	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R35	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R36	RD14BB2C302J	RES. CARBON 3K 5% 1/6W
R37	RD14BB2C510J	RES. CARBON 51 5% 1/6W
R38	RD14BB2C133J	RES. CARBON 13K 5% 1/6W
R39	RD14BB2C273J	RES. CARBON 27K 5% 1/6W
R40	RN14BK2C51R0F	RES. METAL FILM 51.0 1% 1/6W
R43	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R44	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R45	RD14DB2H202J	RES. CARBON 2K 5% 1/2W
R67	RS14GB3DR12J	RES. METAL FILM 0.12 5% 2W
R74	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R75	RD14DB2H202J	RES. CARBON 2K 5% 1/2W
R76	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R77	NO USE	
R78	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R79	RD14DB2H102J	RES. CARBON 1K 5% 1/2W
R85	RD14DB2H101J	RES. CARBON 100 5% 1/2W
R88	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R89	NO USE	
R90	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R91	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R92	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R93	RD14BB2C205J	RES. CARBON 2K 5% 1/6W
R94	RD14BB2C100J	RES. CARBON 10 5% 1/6W
R95	NO USE	
R96	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R32A	RS14GB3AR33J	RES. METAL FILM 0.33 5% 1W
R32B	RS14GB3AR33J	RES. METAL FILM 0.33 5% 1W
R32C	RS14GB3AR33J	RES. METAL FILM 0.33 5% 1W
R01	RN14BK2C4003F	RES. METAL FILM 100K 1% 1/6W
RY1	S76-0604-08	RELAY
RY2	S76-0604-08	RELAY
RY3	S76-0604-08	RELAY
RY4	S76-0630-08	RELAY

REF. NO	PARTS NO	NAME & DESCRIPTION
SW1	S68-0631-05	OUTPUT SW
SW2	S31-1512-08	MASTER/SLAVE SWITCH
VR1	R12-1565-08	RES. SEMI FIXED 2KB
VR2	R12-5547-08	RES. SEMI FIXED 100KB
VR3	R12-0597-08	RES. SEMI FIXED 100
ZD1	HZSGA	DIODE, ZENER 5.75V

PARTS LIST

PR36-1.2A

Y86-1880-00

REF. NO	PARTS NO	NAME & DESCRIPTION
A01-1236-08	COVER	
A63-0115-08	FRONT PANEL	
B31-0756-08	METER;CURRENT	
B31-0759-08	METER;VOLT	
B40-2737-24	SERIAL NO. PLATE	
B42-3731-08	MASTER/SLAVE LABEL	
B42-3740-08	FUSE RATING LABEL	
B42-6025-08	RATING;AC100V 50/60HZ 73W	
B42-6026-08	RATING;AC120V 50/60HZ 73W	
B42-6027-08	RATING;AC220V 50/60HZ 73W	
B42-6028-08	RATING;AC240V 50/60HZ 73W	
B42-6029-08	RATING;AC120V 60HZ 73W	
B63-0173-00	INSTRUCTION MANUAL;JAPANESE	
B63-0174-00	INSTRUCTION MANUAL;ENGLISH	
E21-0670-03	TERMINAL,RED	
E21-0671-03	TERMINAL,BLACK	
E21-0672-03	TERMINAL,WHITE	
E29-0506-04	SHORTING BAR	
E29-0542-08	LUG;M3	
E30-0027-35	UL/CSA POWER CORD	
E30-0545-05	JIS POWER CORD	
E30-0571-15	SAA POWER CORD	
E30-1815-05	CEE POWER CORD	
E30-1867-05	BS POWER CORD	
F01-0884-08	HEAT SINK	
F05-1521-08	FUSE(6X32MM) 1.5A/250V	
F29-0517-08	INSULATOR;FOR Q6/Q11	
F50-0003-08	FUSE(5X20MM) 1.5A/250V	
F51-0008-08	FUSE(6X30MM) 2.5A/125V	
H10-2853-08	FOAMED STYRENE PAD (FRONT)	
H10-2854-08	FOAMED STYRENE PAD (REAR)	
H10-2855-08	STYRENE PAD;83X115X30MM	
H10-2858-08	STYRENE PAD;154X205X30MM	
H20-1734-08	VINYL COVER	
H53-0114-08	CARTON BOX	
J02-0529-08	FOOT	
J19-1671-08	CLAMPER;FOR 2-CORE AC CORD	
J19-1672-08	CLAMPER;FOR 3-CORE AC CORD	
J21-4720-08	BRACKET;FOR P.C.B	
J21-4758-08	BRACKET;FOR AC CORD BUSHING	
J30-0635-08	VOLUME SPACER;FOR VR01	
J42-0083-05	BUSHING;FOR 2-CORE AC CORD	
J42-0085-05	BUSHING;FOR 3-CORE AC CORD	
K21-0907-14	KNOB	
K21-0911-04	KNOB;FINE/CURRENT	
K24-3006-04	KNOB,OUTPUT	
K27-0509-04	PUSH BUTTON,ORANGE;POWER	
L07-1519-08	POWER TRANSFORMER	
N09-0718-05	SCREW,SEMS PAN HD M3X6	
N09-0720-05	SCREW,SEMS PAN HD M4X10	
N09-0757-05	SCREW,SEMS BINDING TAPTITE 3X6	
N09-0789-05	SCREW,SEMS PAN HD M3X10	
N09-0797-08	SCREW,SEMS TAPTITE 3X10	
N14-0404-04	FLANGE NUT M3	
N89-3006-41	SCREW,BINDING TAPTITE 3X6	
N89-3010-41	SCREW,BINDING TAPTITE 3X10	
S40-2533-08	PUSH SWITCH;POWER	
W02-2270-08	AMP UNIT	
VR01 R29-3503-08	VOLUME 10K	
VR02 R39-0800-08	VOLUME 1K	
VR03 R29-3504-08	VOLUME 10K	

PR36-1.2A AMP UNIT

W02-2270-08

REF. NO	PARTS NO	NAME & DESCRIPTION
E21-0674-08	EXTERNAL OUTPUT TERMINAL	
E40-4142-08	PIN CONNECTOR 1P	
E40-7141-08	PIN CONNECTOR 2P(LINE VOLTAGE)	
J13-0518-08	FUSE CLIP;FOR 6X30MM	
J73-0326-08	PCB (UNMOUNTED)	
R92-0150-05	JUMPING RES. ZERO OHM(10MM)	
R92-1061-05	JUMPING RES. ZERO OHM (5MM)	
C1 C90-3023-08	CAP. ELECTRO 470 105°C 35V	
C2 CQ92M1H102K	CAP. MYLAR 1000P 10% 50V	
C3 C91-2559-08	CAP. CERAMIC 0.1 0.25P 50V	
C4 CQ92M1H472K	CAP. MYLAR 4700P 10% 50V	
C5 CQ92M1H103K	CAP. MYLAR 0.01 10% 50V	
C6 NO USE		
C7 C90-3020-08	CAP. ELECTRO 100 105°C 25V	
C8 CF93AN2ER22K	CAP. POLYESTER 0.22P 10% 250V	
C9 NO USE		
C10 C90-3025-08	CAP. ELECTRO 1000 105°C 63V	
C11 CF93AN1JR22K	CAP. POLYESTER 0.22P 10% 63V	
C22 C91-2559-08	CAP. CERAMIC 0.1 0.25P 50V	
C26 C90-3174-08	CAP. ELECTRO 10 1% 50V	
C27 NO USE		
C28 C90-3020-08	CAP. ELECTRO 100 105°C 25V	
C29 C91-2559-08	CAP. CERAMIC 0.1 0.25P 50V	
C32 CF93AN1J1R0K	CAP. POLYESTER 1P 10% 63V	
CN1 E40-7218-08	PIN CONNECTOR 2P	
CN2 E40-7344-08	PIN CONNECTOR 3P	
CN3 NO USE		
CN4 E40-7126-08	PIN CONNECTOR 2P	
CN5 E40-7219-08	PIN CONNECTOR 3P	
CN6 NO USE		
CN7 E40-7229-08	PIN CONNECTOR 4P	
CN11 E40-7332-08	PIN CONNECTOR 4P	
CN12 E40-7333-08	PIN CONNECTOR 2P	
CN13 E40-7333-08	PIN CONNECTOR 2P	
CN18 E40-7440-08	CONNECTOR	
CN23 E40-3240-05	PIN CONNECTOR 5P	
CN24 E40-7333-08	PIN CONNECTOR 2P	
C01 C90-3018-08	CAP. ELECTRO 1 105°C 50V	
C01 C91-1323-08	CAP. CERAMIC 0.1 20% 250V	
C02 NO USE		
C03 C90-3046-08	CAP. ELECTRO 100 105°C 50V	
D1 1B4B42	DIODE,STACK	
D2 ERA15-01	DIODE	
D3 1SS270A	DIODE	
D4 1SS270A	DIODE	
D5 1SS270A	DIODE	
D6 1SS270A	DIODE	
D7 1SS270A	DIODE	
D8 NO USE		
D9 D3SR60	DIODE,STACK	
D10 ERA15-01	DIODE	
D14 1SS270A	DIODE	
D15 1SS270A	DIODE	
D16 1SS270A	DIODE	
D28 1SS270A	DIODE	
D33 ERA15-01	DIODE	
D34 1SS270A	DIODE	
D37 ERA15-01	DIODE	
D38 1SS270A	DIODE	
D39 ERA15-01	DIODE	
D01 ERA15-01	DIODE	
IC1 UPC151C	IC,OP AMP	
IC2 UPC151C	IC,OP AMP	
IC3 UPC1093J	IC,VARIABLE SHUNT REGULATOR	
IC9 HA178L12A	IC,TERMINAL FIXED VOLTAGE REG.	
LED1 LN222RP	LED;RED	
LED2 LN322GP	LED;GREEN	
LED01 LN222RP	LED;RED	
Q1 2SC1815(GR)	TR. SI, NPN	
Q2 2SC1815(GR)	TR. SI, NPN	
Q3 2SC1815(GR)	TR. SI, NPN	

PARTS LIST

PR36-3A

Y86-1890-00

REF. NO	PARTS NO	NAME & DESCRIPTION
A01-1238-08	COVER	
A63-0116-08	FRONT PANEL	
B31-0760-08	METER;VOLT	
B31-0761-08	METER;CURRENT	
B40-2737-24	SERIAL NO. PLATE	
B42-3731-08	MASTER/SLAVE LABEL	
B42-3738-08	FUSE RATING LABEL	
B42-6045-08	RATING;AC100V 50/60HZ 170W	
B42-6046-08	RATING;AC120V 50/60HZ 170W	
B42-6047-08	RATING;AC220V 50/60HZ 170W	
B42-6048-08	RATING;AC240V 50/60HZ 170W	
B42-6049-08	RATING;AC120V 60HZ 170W	
B63-0173-00	INSTRUCTION MANUAL;JAPANESE	
B63-0174-00	INSTRUCTION MANUAL;ENGLISH	
E21-0670-03	TERMINAL,RED	
E21-0671-03	TERMINAL,BLACK	
E21-0672-03	TERMINAL,WHITE	
E29-0506-04	SHORTING BAR	
E29-0542-08	LUG;M3	
E30-0027-35	UL/CSA POWER CORD	
E30-0545-05	JIS POWER CORD	
E30-0571-15	SAA POWER CORD	
E30-1815-05	CEE POWER CORD	
E30-1867-05	BS POWER CORD	
F01-0886-08	HEAT SINK	
F05-3022-05	FUSE(6X32MM) 3A/250V	
F29-0517-08	INSULATOR;FOR Q6/Q11	
F29-0518-08	INSULATOR;FOR Q11A/Q11B/Q11C	
F50-0004-08	FUSE(5X20MM) 3A/250V	
F51-0010-08	FUSE(6X30MM) 5A/125V	
H10-2856-08	FOAMED STYRENE PAD (FRONT)	
H10-2857-08	FOAMED STYRENE PAD (REAR)	
H20-1734-08	VINYL COVER	
H53-0115-08	CARTON BOX	
J02-0529-08	FOOT	
J19-1671-08	CLAMPER;FOR 2-CORE AC CORD	
J19-1672-08	CLAMPER;FOR 3-CORE AC CORD	
J21-4720-08	BRACKET;FOR P.C.B	
J21-4758-08	BRACKET;FOR AC CORD BUSHING	
J30-0635-08	VOLUME SPACER;FOR VR01	
J42-0083-05	BUSHING;FOR 2-CORE AC CORD	
J42-0085-05	BUSHING;FOR 3-CORE AC CORD	
K01-0417-05	HANDLE	
K21-0907-14	KNOB	
K21-0911-04	KNOB;FINE/CURRENT	
K24-3006-04	KNOB,OUTPUT	
K27-0509-04	PUSH BUTTON,ORANGE;POWER	
L07-1520-08	POWER TRANSFORMER	
N09-0718-05	SCREW,SEMS PAN HD M3X6	
N09-0757-05	SCREW,SEMS BINDING TAPTITE 316	
N09-0776-05	SCREW,SEMS PAN HD M3X10	
N09-0777-05	SCREW,SEMS PAN HD M4X6	
N09-0789-05	SCREW,SEMS PAN HD M3X10	
N09-0797-08	SCREW,SEMS TAPTITE 3X10	
N14-0404-04	FLANGE NUT M3	
N89-3006-41	SCREW,BINDING TAPTITE 3X6	
N89-3012-41	SCREW,BINDING TAPTITE 3X12	
S40-2533-08	PUSH SWITCH;POWER	
W02-2271-08	AMP UNIT	
VR01 R29-3503-08	VOLUME 10K	
VR02 R29-1508-08	VOLUME 1K	
VR03 R29-3504-08	VOLUME 10K	

REF. NO	PARTS NO	NAME & DESCRIPTION
Q4 2SC1815(GR)	TR. SI, NPN	
Q5 2SC1815(GR)	TR. SI, NPN	
Q6 2SD1148(O)	TR. SI, NPN	
Q7 2SC2238(Y)	TR. SI, NPN	
Q8 2SC3421(Y)	TR. SI, NPN	
Q9 2SC1815(GR)	TR. SI, NPN	
Q10 2SC1815(GR)	TR. SI, NPN	
Q11 2SD1148(O)	TR. SI, NPN	
Q15 2SC1815(GR)	TR. SI, NPN	
Q16 NO USE		
Q17 DTA143EF	TR. DIGITAL	
R1 RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W	
R2 RD14BB2C123J	RES. CARBON 12K 5% 1/6W	
R2 RD14BB2C122J	RES. CARBON 3K 5% 1/2W	
R3 RD14BB2C302J	RES. CARBON 3K 5% 1/6W	
R4 RD14BB2C510J	RES. CARBON 51 5% 1/6W	
R5 RD14BB2C123J	RES. CARBON 12K 5% 1/6W	
R6 RD14BB2C273J	RES. CARBON 27K 5% 1/6W	
R7 RN14BK2C2401F	RES. METAL FILM 2.4K 1% 1/6W	
R8 RD14BB2C202J	RES. CARBON 2K 5% 1/6W	
R9 RD14BB2C102J	RES. CARBON 1K 5% 1/6W	
R10 RD14BB2C103J	RES. CARBON 10K 5% 1/6W	
R11 RD14BB2C513J	RES. CARBON 51K 5% 1/6W	
R12 NO USE		
R13 RD14BB2C202J	RES. CARBON 2K 5% 1/6W	
R14 RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W	
R15 RD14BB2C102J	RES. CARBON 1K 5% 1/6W	
R16 RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W	
R17 NO USE		
R18 RD14BB2C513J	RES. CARBON 51K 5% 1/6W	
R19 RD14BB2C103J	RES. CARBON 10K 5% 1/6W	
R20 RD14BB2C102J	RES. CARBON 1K 5% 1/6W	
R21 RN14BK2C3303F	RES. METAL FILM 330K 1% 1/6W	
R22 RD14BB2C102J	RES. CARBON 1K 5% 1/6W	
R23 RN14BK2C9101F	RES. METAL FILM 9.1K 1% 1/6W	
R24 RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W	
R27 RD14BB2C102J	RES. CARBON 1K 5% 1/6W	
R28 RD14BB2C103J	RES. CARBON 10K 5% 1/6W	
R29 RS14GB3D392J	RES. METAL FILM 3.9K 5% 2W	
R30 RS14GB3AR47J	RES. METAL FILM 0.47 5% 1W	
R31 NO USE		
R32 RS14GB3AR47J	RES. METAL FILM 0.47 5% 1W	
R33 NO USE		
R34 RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W	
R35 RD14BB2C123J	RES. CARBON 12K 5% 1/6W	
R36 RD14BB2C302J	RES. CARBON 3K 5% 1/6W	
R37 RD14BB2C510J	RES. CARBON 51 5% 1/6W	
R38 RD14BB2C333J	RES. CARBON 33K 5% 1/6W	
R39 RD14BB2C273J	RES. CARBON 27K 5% 1/6W	
R40 RN14BK2C51R0F	RES. METAL FILM 51.0 1% 1/6W	
R43 RD14BB2C103J	RES. CARBON 10K 5% 1/6W	
R44 RD14BB2C101J	RES. CARBON 100 5% 1/6W	
R45 RD14BB2H822J	RES. CARBON 8.2K 5% 1/2W	
R67 RS14GB3DR22J	RES. METAL FILM 0.22 5% 2W	
R74 RD14BB2C102J	RES. CARBON 1K 5% 1/6W	
R75 RD14BB2H822J	RES. CARBON 8.2K 5% 1/2W	
R76 RD14BB2C102J	RES. CARBON 1K 5% 1/6W	
R77 NO USE		
R78 RD14BB2C102J	RES. CARBON 1K 5% 1/6W	
R79 RD14BB2H102J	RES. CARBON 1K 5% 1/2W	
R85 RD14BB2H101J	RES. CARBON 100 5% 1/2W	
R88 RD14BB2C104J	RES. CARBON 100K 5% 1/6W	
R89 NO USE		
R90 RD14BB2C102J	RES. CARBON 1K 5% 1/6W	
R91 RD14BB2C103J	RES. CARBON 10K 5% 1/6W	
R92 RD14BB2C102J	RES. CARBON 1K 5% 1/6W	
R93 RD14BB2C205J	RES. CARBON 2M 5% 1/6W	
R94 RD14BB2C510J	RES. CARBON 51 5% 1/6W	
R95 NO USE		
R96 RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W	
R01 RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W	
RY1 S7G-0604-08	RELAY	
RY2 S7G-0604-08	RELAY	
RY3 S7G-0604-08	RELAY	
RY4 S7G-0630-08	RELAY	
SW1 S68-0631-05	OUTPUT SW	
SW2 S31-1512-08	MASTER/SLAVE SWITCH	
VR1 R12-1564-08	RES. SEMI FIXED 1KB	
VR2 R12-5547-08	RES. SEMI FIXED 100KB	
VR3 R12-0597-08	RES. SEMI FIXED 100	
ZD1 HZSGA	DIODE, ZENER 5.75V	

PARTS LIST

PR36-3A AMP UNIT			
W02-2271-08			
REF. NO	PARTS NO	NAME & DESCRIPTION	
	E21-0674-08	EXTERNAL OUTPUT TERMINAL	
	E40-7141-08	PIN CONNECTOR 2P(LINE VOLTAGE)	
	E40-7142-08	PIN CONNECTOR 1P(LINE VOLTAGE)	
	J13-0518-08	FUSE CLIP;FOR 6X30MM	
	J73-0326-08	PCB (UNMOUNTED)	
	R92-0150-05	JUMPING RES.	ZERO OHM(10MM)
	R92-1061-05	JUMPING RES.	ZERO OHM (5MM)
C1	C90-3019-08	CAP. ELECTRO	1000 105'C 35V
C2	CQ92MIH102K	CAP. MYLAR	1000P 10% 50V
C3	C91-2559-08	CAP. CERAMIC	0.1 0.25P 50V
C4	CQ92MIH472K	CAP. MYLAR	4700P 10% 50V
C5	CQ92MIH103K	CAP. MYLAR	0.01 10% 50V
C6	NO USE		
C7	C90-3020-08	CAP. ELECTRO	100 105'C 25V
C8	CF93AN2ER22K	CAP. POLYESTER	0.22P 10% 250V
C9	NO USE		
C10	C90-3042-08	CAP. ELECTRO	2200 105'C 63V
C11	CF93AN1JR22K	CAP. POLYESTER	0.22P 10% 63V
C22	C91-2559-08	CAP. CERAMIC	0.1 0.25P 50V
C26	C90-3174-08	CAP. ELECTRO	10 1% 50V
C27	NO USE		
C28	C90-3020-08	CAP. ELECTRO	100 105'C 25V
C29	C91-2559-08	CAP. CERAMIC	0.1 0.25P 50V
C32	CF93AN1J1R0K	CAP. POLYESTER	1P 10% 63V
CN1	E40-7218-08	PIN CONNECTOR	2P
CN2	E40-7344-08	PIN CONNECTOR	3P
CN3	NO USE		
CN4	E40-7126-08	PIN CONNECTOR	2P
CN5	E40-7219-08	PIN CONNECTOR	3P
CN6	E40-7219-08	PIN CONNECTOR	3P
CN7	E40-7229-08	PIN CONNECTOR	4P
CN8	E40-7229-08	PIN CONNECTOR	4P
CN11	E40-7332-08	PIN CONNECTOR	4P
CN12	E40-7333-08	PIN CONNECTOR	2P
CN13	E40-7333-08	PIN CONNECTOR	2P
CN18	E40-7440-08	CONNECTOR	
CN23	E40-3240-05	PIN CONNECTOR	5P
CN24	E40-7333-08	PIN CONNECTOR	2P
C01	C90-3018-08	CAP. ELECTRO	1 105'C 50V
C01	C91-1323-08	CAP. CERAMIC	0.1 20% 250V
C02	NO USE		
C03	C90-3046-08	CAP. ELECTRO	100 105'C 50V
D1	1B4B42	DIODE,STACK	
D2	ERA15-01	DIODE	
D3	1SS270A	DIODE	
D4	1SS270A	DIODE	
D5	1SS270A	DIODE	
D6	1SS270A	DIODE	
D7	1SS270A	DIODE	
D8	NO USE		
D9	D10XB40	DIODE,STACK	
D10	ERA15-01	DIODE	
D14	1SS270A	DIODE	
D15	1SS270A	DIODE	
D16	1SS270A	DIODE	
D28	1SS270A	DIODE	
D33	ERA15-01	DIODE	
D34	1SS270A	DIODE	
D37	ERA15-01	DIODE	
D38	1SS270A	DIODE	
D39	ERA15-01	DIODE	
D01	30D1	DIODE	
IC1	UPC151C	IC,OP AMP	
IC2	UPC151C	IC,OP AMP	
IC3	UPC1093J	IC,VARIABLE SHUNT REGULATOR	
IC9	HA178L12A	IC,TERMINAL FIXED VOLTAGE REG.	
LED1	LN322GP	LED:GREEN	
LED2	LN222RP	LED:RED	
LEDO	LN222RP	LED:RED	
LED01	LN222RP	LED:RED	
Q1	2SC1815(GR)	TR. SI, NPN	
Q2	2SC1815(GR)	TR. SI, NPN	

REF. NO	PARTS NO	NAME & DESCRIPTION			
Q3	2SC1815(GR)	TR. SI, NPN			
Q4	2SC1815(GR)	TR. SI, NPN			
Q5	2SC1815(GR)	TR. SI, NPN			
Q6	2SD1148(O)	TR. SI, NPN			
Q7	2SC2238(Y)	TR. SI, NPN			
Q8	2SC3421(Y)	TR. SI, NPN			
Q9	2SC1815(GR)	TR. SI, NPN			
Q10	2SC1815(GR)	TR. SI, NPN			
Q11	2SD1148(O)	TR. SI, NPN			
Q15	2SC1815(GR)	TR. SI, NPN			
Q16	NO USE				
Q17	DTA143EF	TR. DIGITAL			
Q11A	2SD1148(O)	TR. SI, NPN			
Q11B	2SD1148(O)	TR. SI, NPN			
Q11C	2SD1148(O)	TR. SI, NPN			
R1	RD14BB2C122J	RES. CARBON	1.2K	5%	1/6W
R2	RD14BB2C123J	RES. CARBON	12K	5%	1/6W
R2	RD14BB2H302J	RES. CARBON	3K	5%	1/2W
R3	RD14BB2C302J	RES. CARBON	3K	5%	1/6W
R4	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R5	RD14BB2C123J	RES. CARBON	12K	5%	1/6W
R6	RD14BB2C273J	RES. CARBON	27K	5%	1/6W
R7	RN14BK2C2401F	RES. METAL FILM	2.4K	1%	1/6W
R8	RD14BB2C202J	RES. CARBON	2K	5%	1/6W
R9	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R10	RD14BB2C302J	RES. CARBON	3K	5%	1/6W
R11	RD14BB2C513J	RES. CARBON	51K	5%	1/6W
R12	NO USE				
R13	RD14BB2C202J	RES. CARBON	2K	5%	1/6W
R14	RD14BB2C152J	RES. CARBON	1.5K	5%	1/6W
R15	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R16	RD14BB2C512J	RES. CARBON	5.1K	5%	1/6W
R17	NO USE				
R18	RD14BB2C513J	RES. CARBON	51K	5%	1/6W
R19	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R20	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R21	RN14BK2C3303F	RES. METAL FILM	330K	1%	1/6W
R22	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R23	RN14BK2C9102F	RES. METAL FILM	91K	1%	1/6W
R24	RN14BK2C3001F	RES. METAL FILM	3K	1%	1/6W
R27	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R28	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R29	RS14GB3D392J	RES. METAL FILM	3.9K	5%	2W
R30	RS14GB3AR51J	RES. METAL FILM	0.51	5%	1W
R31	NO USE				
R32	RS14GB3AR51J	RES. METAL FILM	0.51	5%	1W
R33	NO USE				
R34	RD14BB2C122J	RES. CARBON	1.2K	5%	1/6W
R35	RD14BB2C123J	RES. CARBON	12K	5%	1/6W
R36	RD14BB2C302J	RES. CARBON	3K	5%	1/6W
R37	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R38	RD14BB2C333J	RES. CARBON	33K	5%	1/6W
R39	RD14BB2C273J	RES. CARBON	27K	5%	1/6W
R40	RN14BK2C51R0F	RES. METAL FILM	51.0	1%	1/6W
R43	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R44	RD14BB2C101J	RES. CARBON	100	5%	1/6W
R45	RD14DB2H822J	RES. CARBON	8.2K	5%	1/2W
R67	RS14GB3DR15J	RES. METAL FILM	0.15	5%	2W
R74	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R75	RD14DB2H822J	RES. CARBON	8.2K	5%	1/2W
R76	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R77	NO USE				
R78	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R79	RD14DB2H102J	RES. CARBON	1K	5%	1/2W
R85	RD14DB2H101J	RES. CARBON	100	5%	1/2W
R88	RD14BB2C104J	RES. CARBON	100K	5%	1/6W
R89	NO USE				
R90	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R91	RD14BB2C103J	RES. CARBON	10K	5%	1/6W
R92	RD14BB2C102J	RES. CARBON	1K	5%	1/6W
R93	RD14BB2C205J	RES. CARBON	2K	5%	1/6W
R94	RD14BB2C510J	RES. CARBON	51	5%	1/6W
R95	NO USE				
R96	RD14BB2C912J	RES. CARBON	9.1K	5%	1/6W
R32A	RS14GB3AR51J	RES. METAL FILM	0.51	5%	1W
R32B	RS14GB3AR51J	RES. METAL FILM	0.51	5%	1W
R32C	RS14GB3AR51J	RES. METAL FILM	0.51	5%	1W
R01	RN14BK2C1003F	RES. METAL FILM	100K	1%	1/6W
RY1	S76-0604-08	RELAY			
RY2	S76-0604-08	RELAY			
RY3	S76-0604-08	RELAY			
RY4	S76-0604-08	RELAY			

W02-2271-08		
REF. NO	PARTS NO	NAME & DESCRIPTION
SW1	S68-0631-05	OUTPUT SW
SW2	S31-1512-08	MASTER/SLAVE SWITCH
VR1	R12-1564-08	RES. SEMI FIXED 1KB
VR2	R12-5547-08	RES. SEMI FIXED 100KB
VR3	R12-0597-08	RES. SEMI FIXED 100
ZD1	HZSGA	DIODE, ZENER 5.75V

PARTS LIST

PR70-1A		
Y86-1900-00		
REF. NO	PARTS NO	NAME & DESCRIPTION
	A01-1237-08	CASE
	A63-0117-08	FRONT PANEL
	B31-0761-08	METER;CURRENT
	B31-0762-08	METER;VOLT
	B40-2737-24	SERIAL NO. PLATE
	B42-3731-08	MASTER/SLAVE LABEL
	B42-3733-08	FUSE RATING LABEL
	B42-6050-08	RATING:AC100V 50/60HZ 110W
	B42-6051-08	RATING:AC120V 50/60HZ 110W
	B42-6052-08	RATING:AC220V 50/60HZ 110W
	B42-6053-08	RATING:AC240V 50/60HZ 110W
	B42-6054-08	RATING:AC120V 60HZ 110W
	B63-0173-00	INSTRUCTION MANUAL;JAPANESE
	B63-0174-00	INSTRUCTION MANUAL;ENGLISH
	E21-0670-03	TERMINAL,RED
	E21-0671-03	TERMINAL,BLACK
	E21-0672-03	TERMINAL,WHITE
	E29-0506-04	SHORTING BAR
	E29-0542-08	LUG;M3
	E30-0027-35	UL/CSA POWER CORD
	E30-0545-05	JIS POWER CORD
	E30-0571-15	SAA POWER CORD
	E30-1815-05	CEE POWER CORD
	E30-1867-05	BS POWER CORD
	F01-0885-08	HEAT SINK
	F05-2021-08	FUSE(5X20MM) 2A/250V
	F05-2023-05	FUSE(6X32MM) 2A/250V
	F29-0517-08	INSULATOR;FOR Q6/Q11
	F29-0518-08	INSULATOR;FOR Q11A/Q11B/Q11C
	F51-0009-08	FUSE(6X30MM) 3A/125V
	H10-2853-08	FOAMED STYRENE PAD (FRONT)
	H10-2854-08	FOAMED STYRENE PAD (REAR)
	H20-1734-08	VINYL COVER
	H53-0116-08	CARTON BOX
	J02-0529-08	FOOT
	J19-1671-08	CLAMPER;FOR 2-CORE AC CORD
	J19-1672-08	CLAMPER;FOR 3-CORE AC CORD
	J21-4720-08	BRACKET;FOR P. C. B
	J21-4758-08	BRACKET;FOR AC CORD BUSHING
	J29-0519-08	BRACKET;FOR P. C. B
	J30-0635-08	VOLUME SPACER;FOR VR01
	J42-0083-05	BUSHING;FOR 2-CORE AC CORD
	J42-0085-05	BUSHING;FOR 3-CORE AC CORD
	K01-0417-05	HANDLE
	K21-0907-14	KNOB
	K21-0911-04	KNOB;FINE/CURRENT
	K24-3006-04	KNOB,OUTPUT
	K27-0509-04	PUSH BUTTON,ORANGE;POWER
	L07-1521-08	POWER TRANSFORMER
	N09-0718-05	SCREW,SEMS PAN HD M3X6
	N09-0757-05	SCREW,SEMS BINDING TAPTITE 3X6
	N09-0776-05	SCREW,SEMS PAN HD M3X10
	N09-0777-05	SCREW,SEMS PAN HD M4X6
	N09-0789-05	SCREW,SEMS PAN HD M3X10
	N09-0797-08	SCREW,SEMS TAPTITE 3X10
	N14-0404-04	FLANGE NUT M3
	N89-3006-41	SCREW,BINDING TAPTITE 3X6
	N89-3012-41	SCREW,BINDING TAPTITE 3X12
	S40-2533-08	PUSH SWITCH;POWER
	W02-2272-08	AMP UNIT
VR01	R29-3503-08	VOLUME 10K
VR02	R29-1508-08	VOLUME 1K
VR03	R29-3504-08	VOLUME 10K

PARTS LIST


PARTS LIST

PR70-1A AMP UNIT		
W02-2272-08		
REF. NO	PARTS NO	NAME & DESCRIPTION
	E21-0674-08	EXTERNAL OUTPUT TERMINAL
	E40-7141-08	PIN CONNECTOR 2P(LINE VOLTAGE)
	E40-7142-08	PIN CONNECTOR 1P(LINE VOLTAGE)
	J13-0518-08	FUSE CLIP;FOR 6X30MM
	J73-0326-08	PCB (UNMOUNTED)
	R92-0150-05	JUMPING RES. ZERO OHM(10MM)
	R92-1061-05	JUMPING RES. ZERO OHM (5MM)
C1	C90-3023-08	CAP. ELECTRO 470 105°C 35V
C2	C902M1H102K	CAP. MYLAR 1000P 10% 50V
C3	C91-2559-08	CAP. CERAMIC 0.1 0.25P 50V
C4	C902M1H472K	CAP. MYLAR 4700P 10% 50V
C5	C902M1H103K	CAP. MYLAR 0.01 10% 50V
C6	NO USE	
C7	C90-3020-08	CAP. ELECTRO 100 105°C 25V
C8	CF93AN2ER22K	CAP. POLYESTER 0.22P 10% 250V
C9	NO USE	
C10	C90-3039-08	CAP. ELECTRO 330 105°C 160V
C11	CF93AN1JR22K	CAP. POLYESTER 0.22P 10% 63V
C22	C91-2559-08	CAP. CERAMIC 0.1 0.25P 50V
C26	C90-4504-08	CAP. ELECTRO 10 100V
C27	NO USE	
C28	C90-3020-08	CAP. ELECTRO 100 105°C 25V
C29	C91-2559-08	CAP. CERAMIC 0.1 0.25P 50V
C32	CF93AN1J1R0K	CAP. POLYESTER 1P 10% 63V
C101	C91-2588-08	CAP. CERAMIC 0.1 10% 630V
CN1	E40-7218-08	PIN CONNECTOR 2P
CN2	E40-7344-08	PIN CONNECTOR 3P
CN3	NO USE	
CN4	E40-7126-08	PIN CONNECTOR 2P
CN5	E40-7219-08	PIN CONNECTOR 3P
CN6	E40-7219-08	PIN CONNECTOR 3P
CN7	E40-7229-08	PIN CONNECTOR 4P
CN11	E40-7332-08	PIN CONNECTOR 4P
CN12	E40-7333-08	PIN CONNECTOR 2P
CN13	E40-7333-08	PIN CONNECTOR 2P
CN18	E40-7440-08	CONNECTOR
CN23	E40-3240-05	PIN CONNECTOR 5P
CN24	E40-7333-08	PIN CONNECTOR 2P
C01	C90-3038-08	CAP. ELECTRO 1 105°C 100V
C01	C91-1323-08	CAP. CERAMIC 0.1 20% 250V
C02	NO USE	
C03	C90-3048-08	CAP. ELECTRO 100 105°C 100V
D1	1B4H42	DIODE,STACK
D2	ERA15-01	DIODE
D3	ISS270A	DIODE
D4	ISS270A	DIODE
D5	ISS270A	DIODE
D6	ISS270A	DIODE
D7	ISS270A	DIODE
D8	NO USE	
D9	D3SR60	DIODE,STACK
D10	ERA15-01	DIODE
D14	ISS270A	DIODE
D15	ISS270A	DIODE
D16	ISS270A	DIODE
D28	ISS270A	DIODE
D33	ERA15-01	DIODE
D34	ISS270A	DIODE
D37	ERA15-01	DIODE
D38	ISS270A	DIODE
D39	ERA15-01	DIODE
D01	ERA15-01	DIODE
IC1	UPC151C	IC,OP AMP
IC2	UPC151C	IC,OP AMP
IC3	UPC1093J	IC,VARIABLE SHUNT REGULATOR
IC9	HA178L12A	IC,TERMINAL FIXED VOLTAGE REG.
LED1	LN222RP	LED:RED
LED2	LN322GP	LED:GREEN
LED0	LN222RP	LED:RED
LED01	LN222RP	LED:RED


REF. NO	PARTS NO	NAME & DESCRIPTION
Q1	2SC1815(GR)	TR. SI, NPN
Q2	2SC1815(GR)	TR. SI, NPN
Q3	2SC1815(GR)	TR. SI, NPN
Q4	2SC1815(GR)	TR. SI, NPN
Q5	2SC1815(GR)	TR. SI, NPN
Q6	2SD1148(O)	TR. SI, NPN
Q7	2SC2238(Y)	TR. SI, NPN
Q8	2SC3421(Y)	TR. SI, NPN
Q9	2SC1815(GR)	TR. SI, NPN
Q10	2SC1815(GR)	TR. SI, NPN
Q11	2SD1148(O)	TR. SI, NPN
Q15	2SC1815(GR)	TR. SI, NPN
Q16	NO USE	
Q17	DTA143EF	TR. DIGITAL
Q11A	2SD1148(O)	TR. SI, NPN
Q11B	2SD1148(O)	TR. SI, NPN
Q11C	2SD1148(O)	TR. SI, NPN
R1	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R2	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R2	RD14DB2H302J	RES. CARBON 3K 5% 1/2W
R3	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R4	RD14BB2C510J	RES. CARBON 51 5% 1/6W
R5	RD14BB2C303J	RES. CARBON 30K 5% 1/6W
R6	RD14BB2C273J	RES. CARBON 27K 5% 1/6W
R7	RN14BK2C1001F	RES. METAL FILM 1K 1% 1/6W
R8	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R9	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R10	RD14BB2C243J	RES. CARBON 24K 5% 1/6W
R11	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R12	NO USE	
R13	RD14BB2C202J	RES. CARBON 2K 5% 1/6W
R14	RD14BB2C152J	RES. CARBON 1.5K 5% 1/6W
R15	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R16	RD14BB2C512J	RES. CARBON 5.1K 5% 1/6W
R17	NO USE	
R18	RD14BB2C513J	RES. CARBON 51K 5% 1/6W
R19	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R20	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R21	RN14BK2C3903F	RES. METAL FILM 390K 1% 1/6W
R22	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R23	RN14BK2C9101F	RES. METAL FILM 9.1K 1% 1/6W
R24	RN14BK2C3001F	RES. METAL FILM 3K 1% 1/6W
R27	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R28	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R29	RS14GB3D123J	RES. METAL FILM 12K 5% 2W
R30	RS14GB3A1R5J	RES. METAL FILM 1.5 5% 1W
R31	NO USE	
R32	RS14GB3A1R5J	RES. METAL FILM 1.5 5% 1W
R33	NO USE	
R34	RD14BB2C122J	RES. CARBON 1.2K 5% 1/6W
R35	RD14BB2C123J	RES. CARBON 12K 5% 1/6W
R36	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R37	RD14BB2C510J	RES. CARBON 51 5% 1/6W
R38	RD14BB2C753J	RES. CARBON 75K 5% 1/6W
R39	RD14BB2C273J	RES. CARBON 27K 5% 1/6W
R40	RN14BK2C51R0F	RES. METAL FILM 51.0 1% 1/6W
R43	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R44	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R45	RD14DB2H303J	RES. CARBON 30K 5% 1/2W
R67	RS14GB3DR22J	RES. METAL FILM 0.22 5% 2W
R74	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R75	RD14DB2H303J	RES. CARBON 30K 5% 1/2W
R76	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R77	NO USE	
R78	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R79	RD14DB2H102J	RES. CARBON 1K 5% 1/2W
R85	RD14DB2H101J	RES. CARBON 100 5% 1/2W
R88	RD14BB2C104J	RES. CARBON 100K 5% 1/6W
R89	NO USE	
R90	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R91	RD14BB2C103J	RES. CARBON 10K 5% 1/6W
R92	RD14BB2C102J	RES. CARBON 1K 5% 1/6W
R93	RD14BB2C205J	RES. CARBON 2M 5% 1/6W
R94	RD14BB2C101J	RES. CARBON 100 5% 1/6W
R95	NO USE	
R96	RD14BB2C912J	RES. CARBON 9.1K 5% 1/6W
R32A	RS14GB3A1R5J	RES. METAL FILM 1.5 5% 1W
R32B	RS14GB3A1R5J	RES. METAL FILM 1.5 5% 1W
R32C	RS14GB3A1R5J	RES. METAL FILM 1.5 5% 1W
R01	RN14BK2C1003F	RES. METAL FILM 100K 1% 1/6W
RY1	S76-0604-08	RELAY
RY2	S76-0604-08	RELAY
RY3	S76-0604-08	RELAY

REF. NO	PARTS NO	NAME & DESCRIPTION
RY4	S76-0630-08	RELAY
SW1	S68-0631-08	MASTER/SLAVE SWITCH
SW2	S31-1512-08	
VR1	R12-1564-08	RES. SEMI FIXED 1KB
VR2	R12-5547-08	RES. SEMI FIXED 100KB
VR3	R12-0597-08	RES. SEMI FIXED 100
ZD1	HZSGA	DIODE, ZENER 5.75V


SCHEMATIC DIAGRAM PR18-1.2A

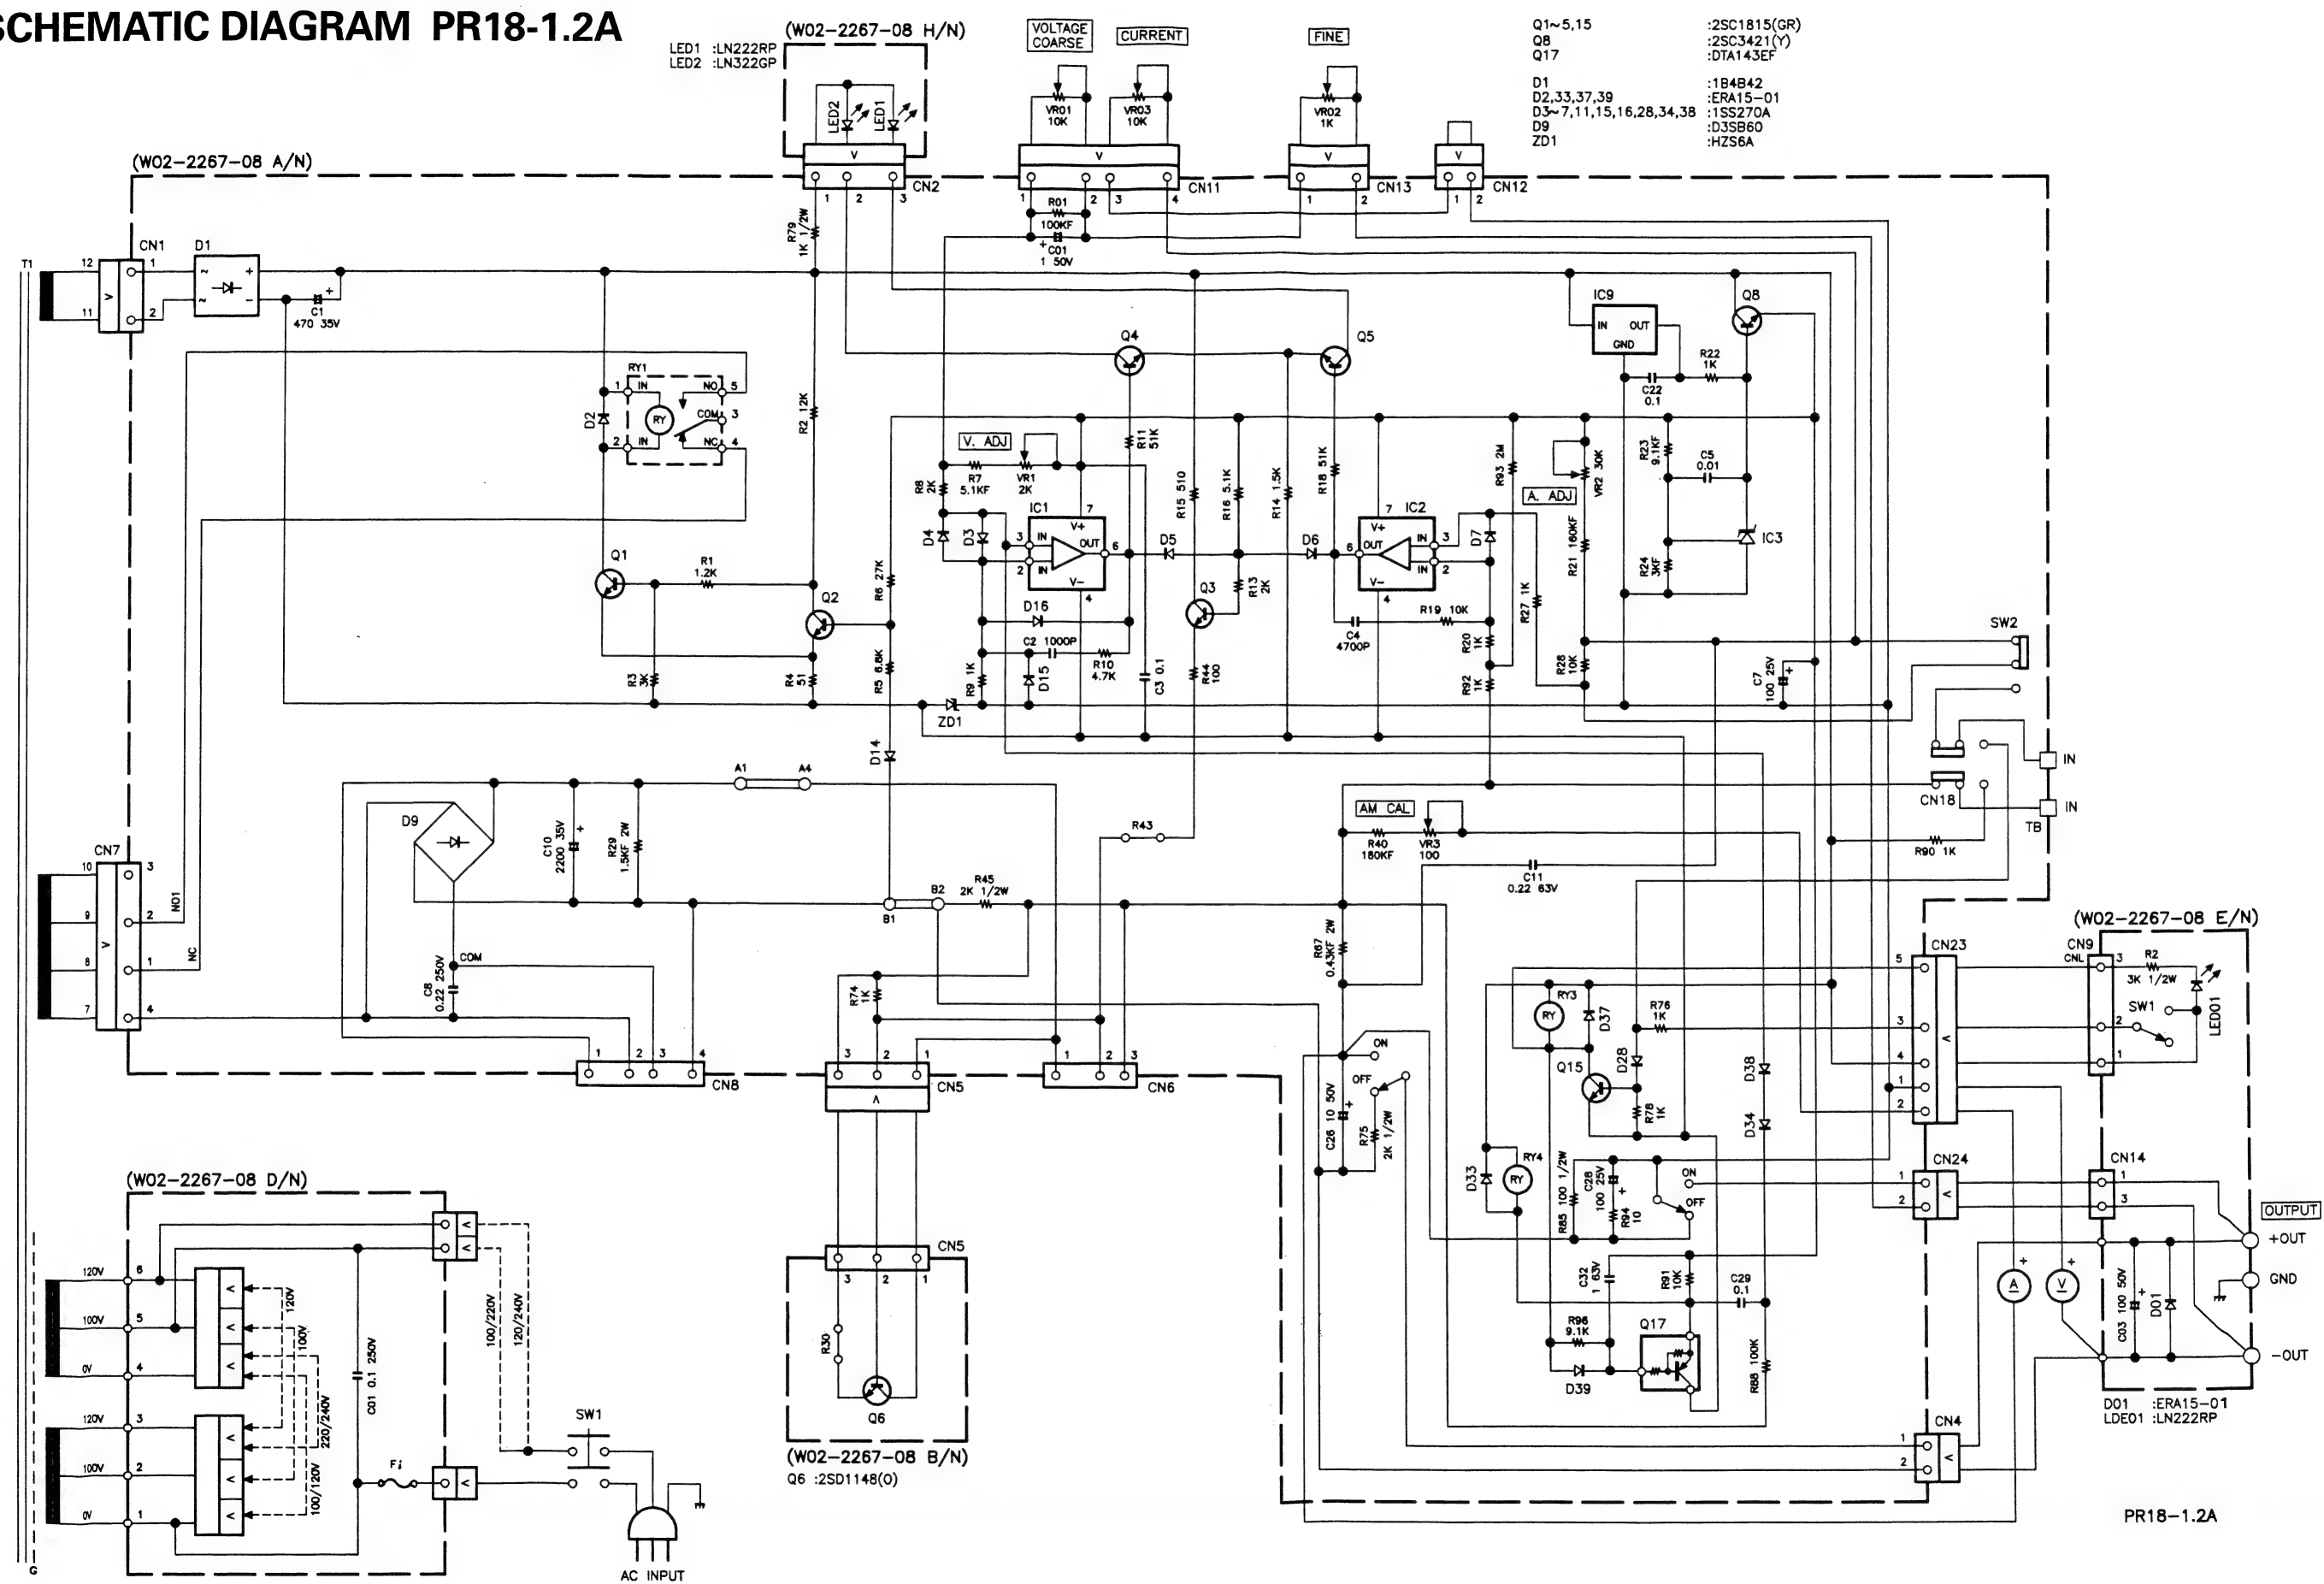


SCHEMATIC DIAGRAM PR18-3A

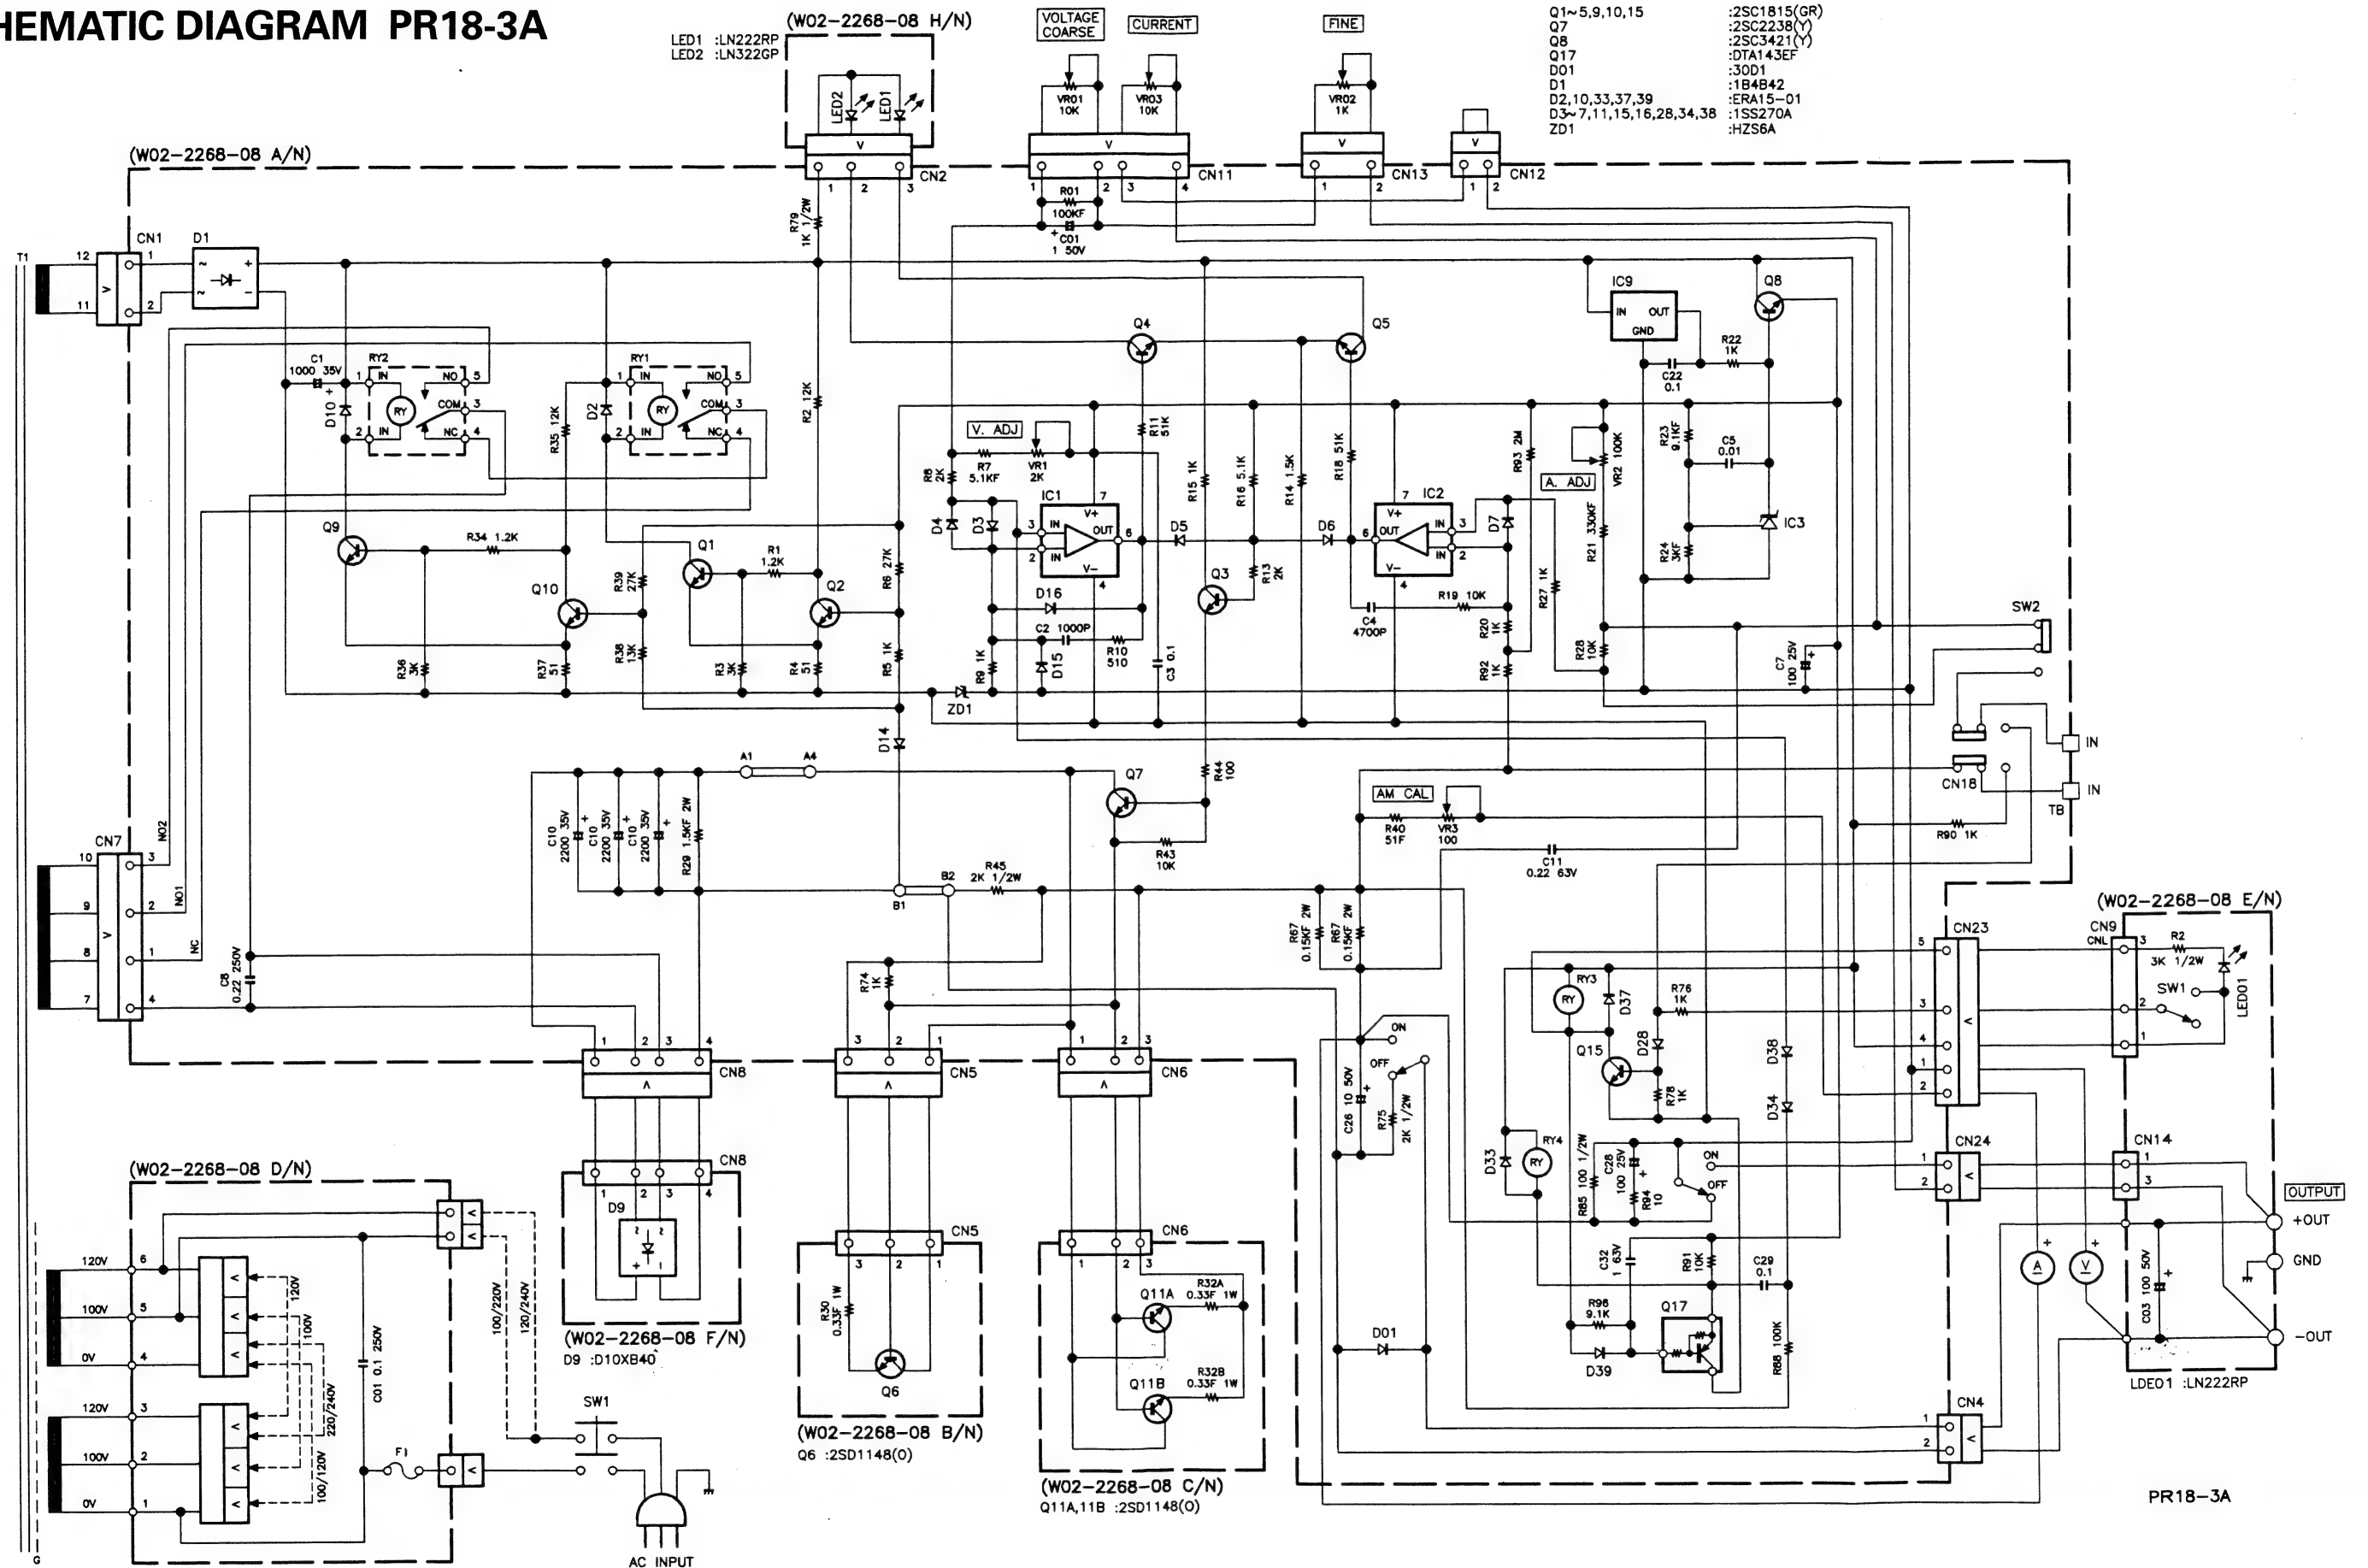


SCHEMATIC DIAGRAM PR18-5A

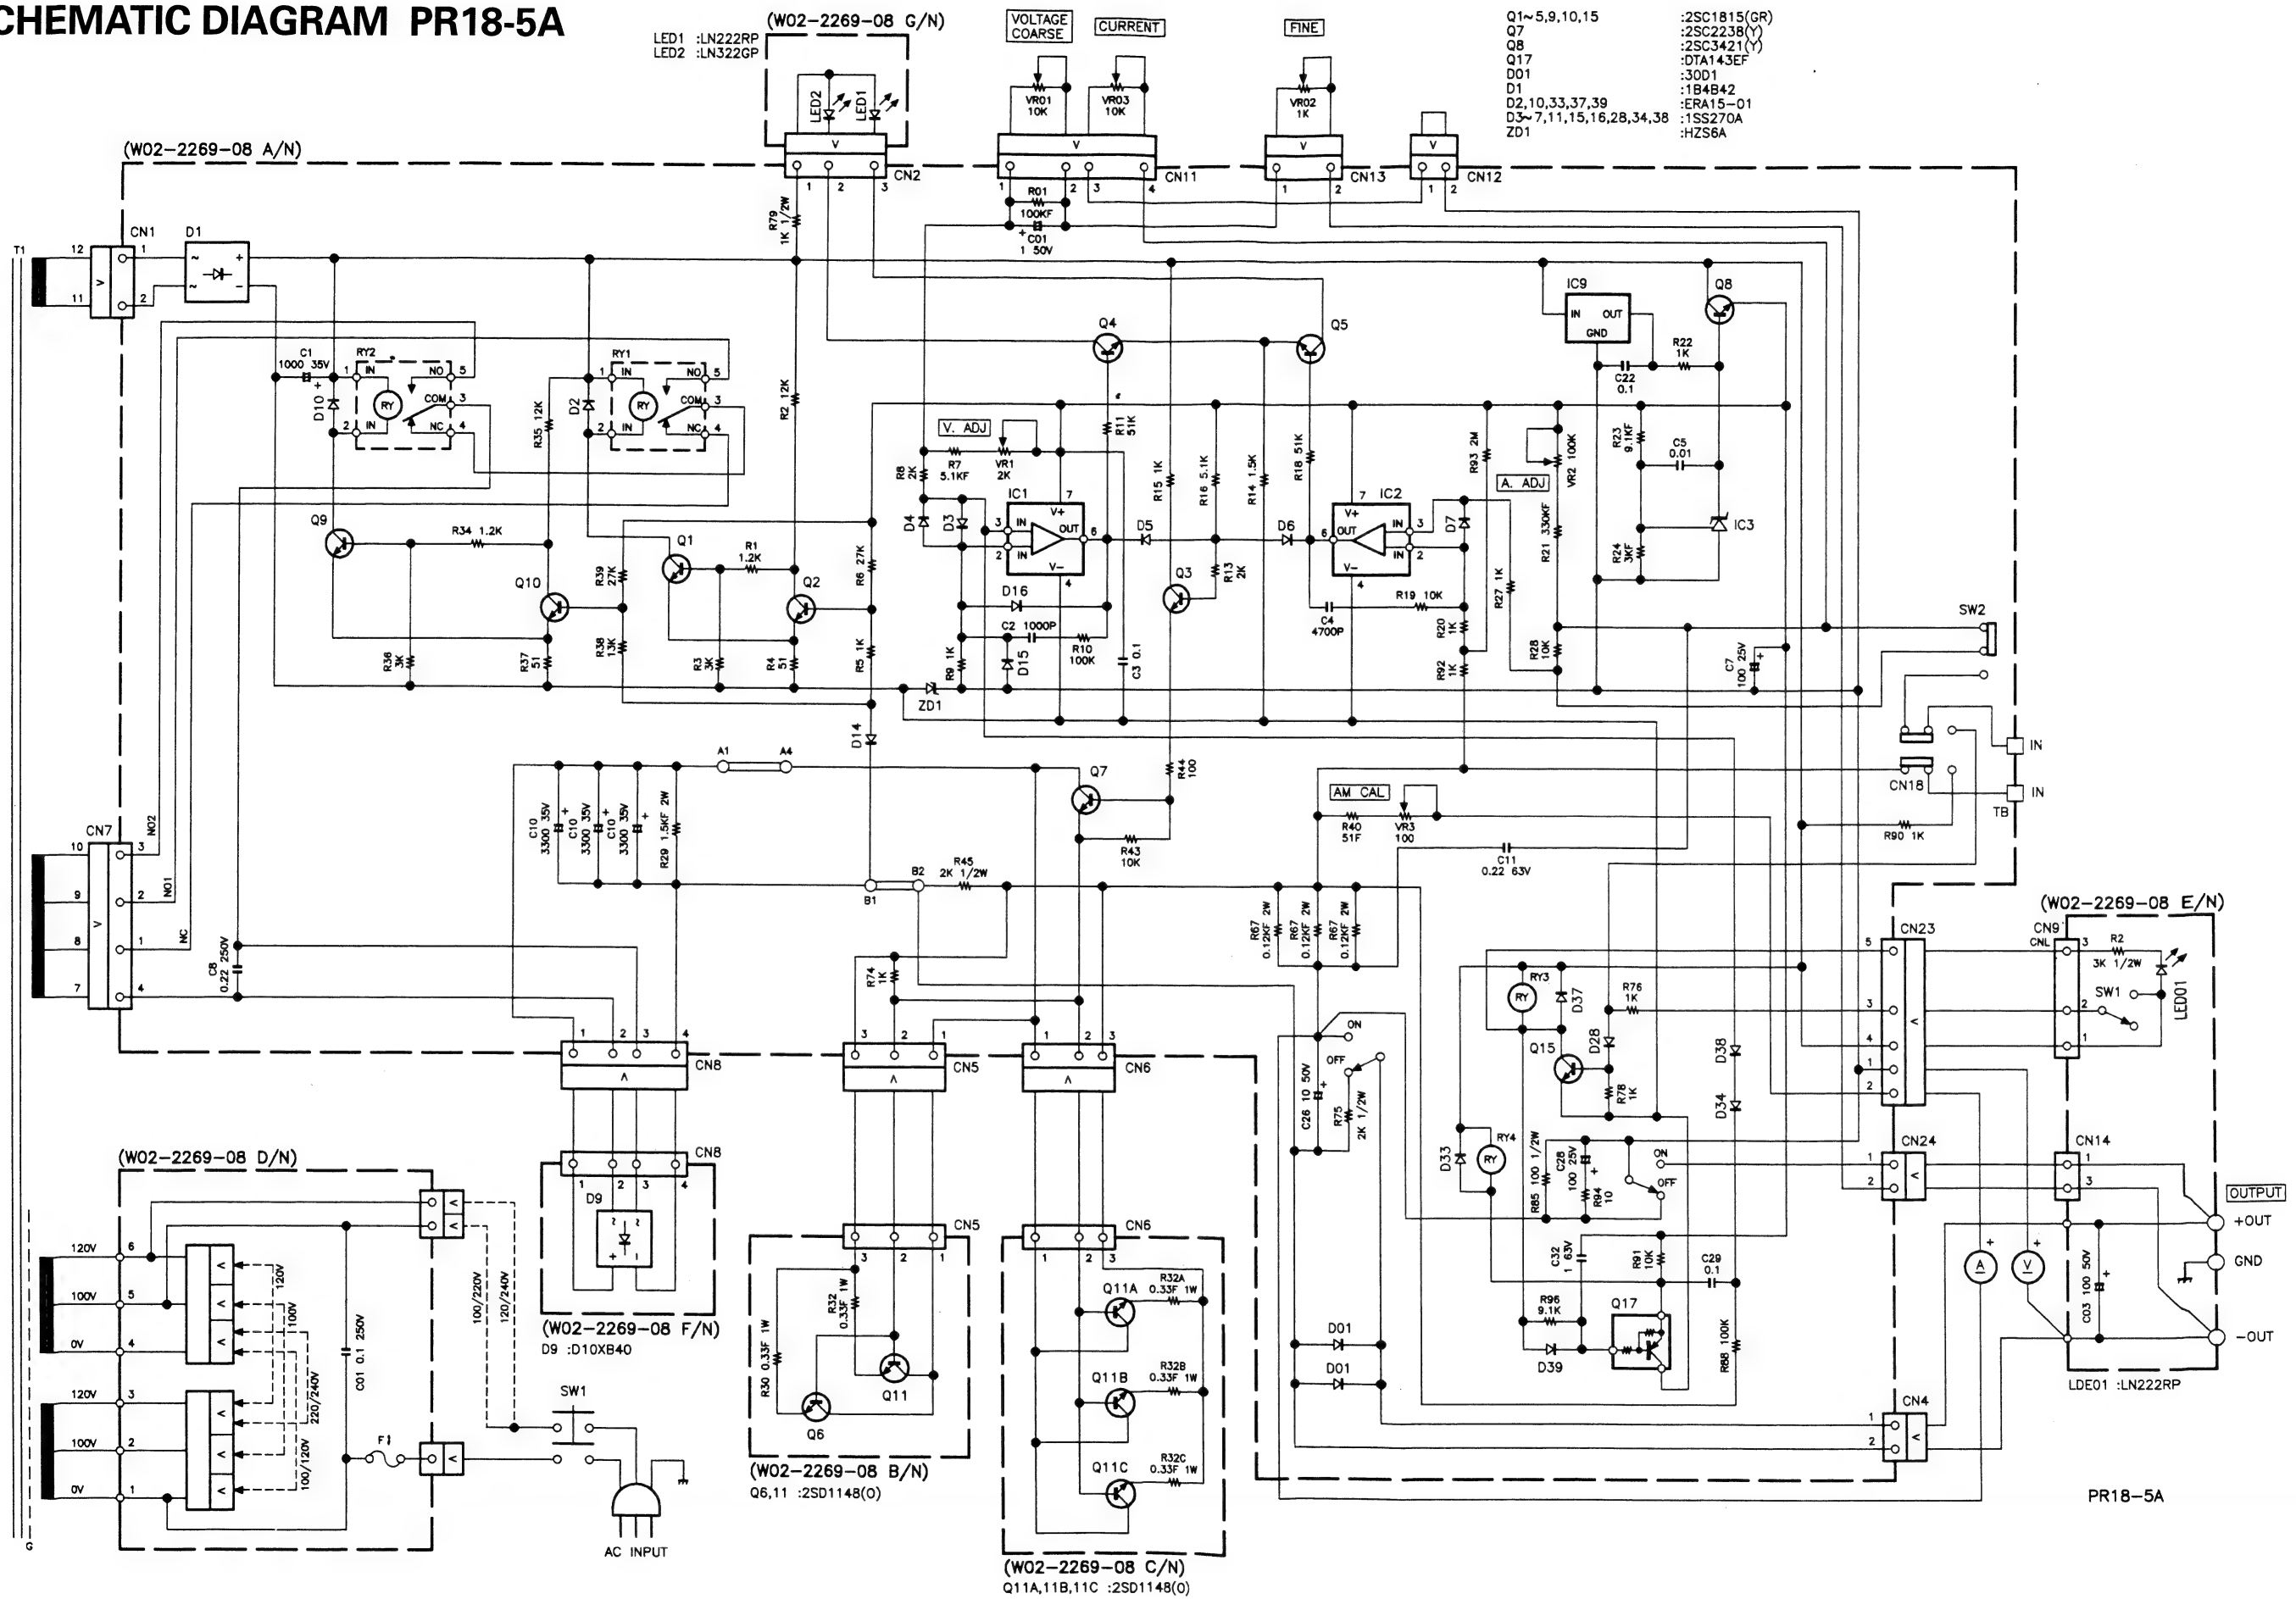

SCHEMATIC DIAGRAM PR36-1.2A

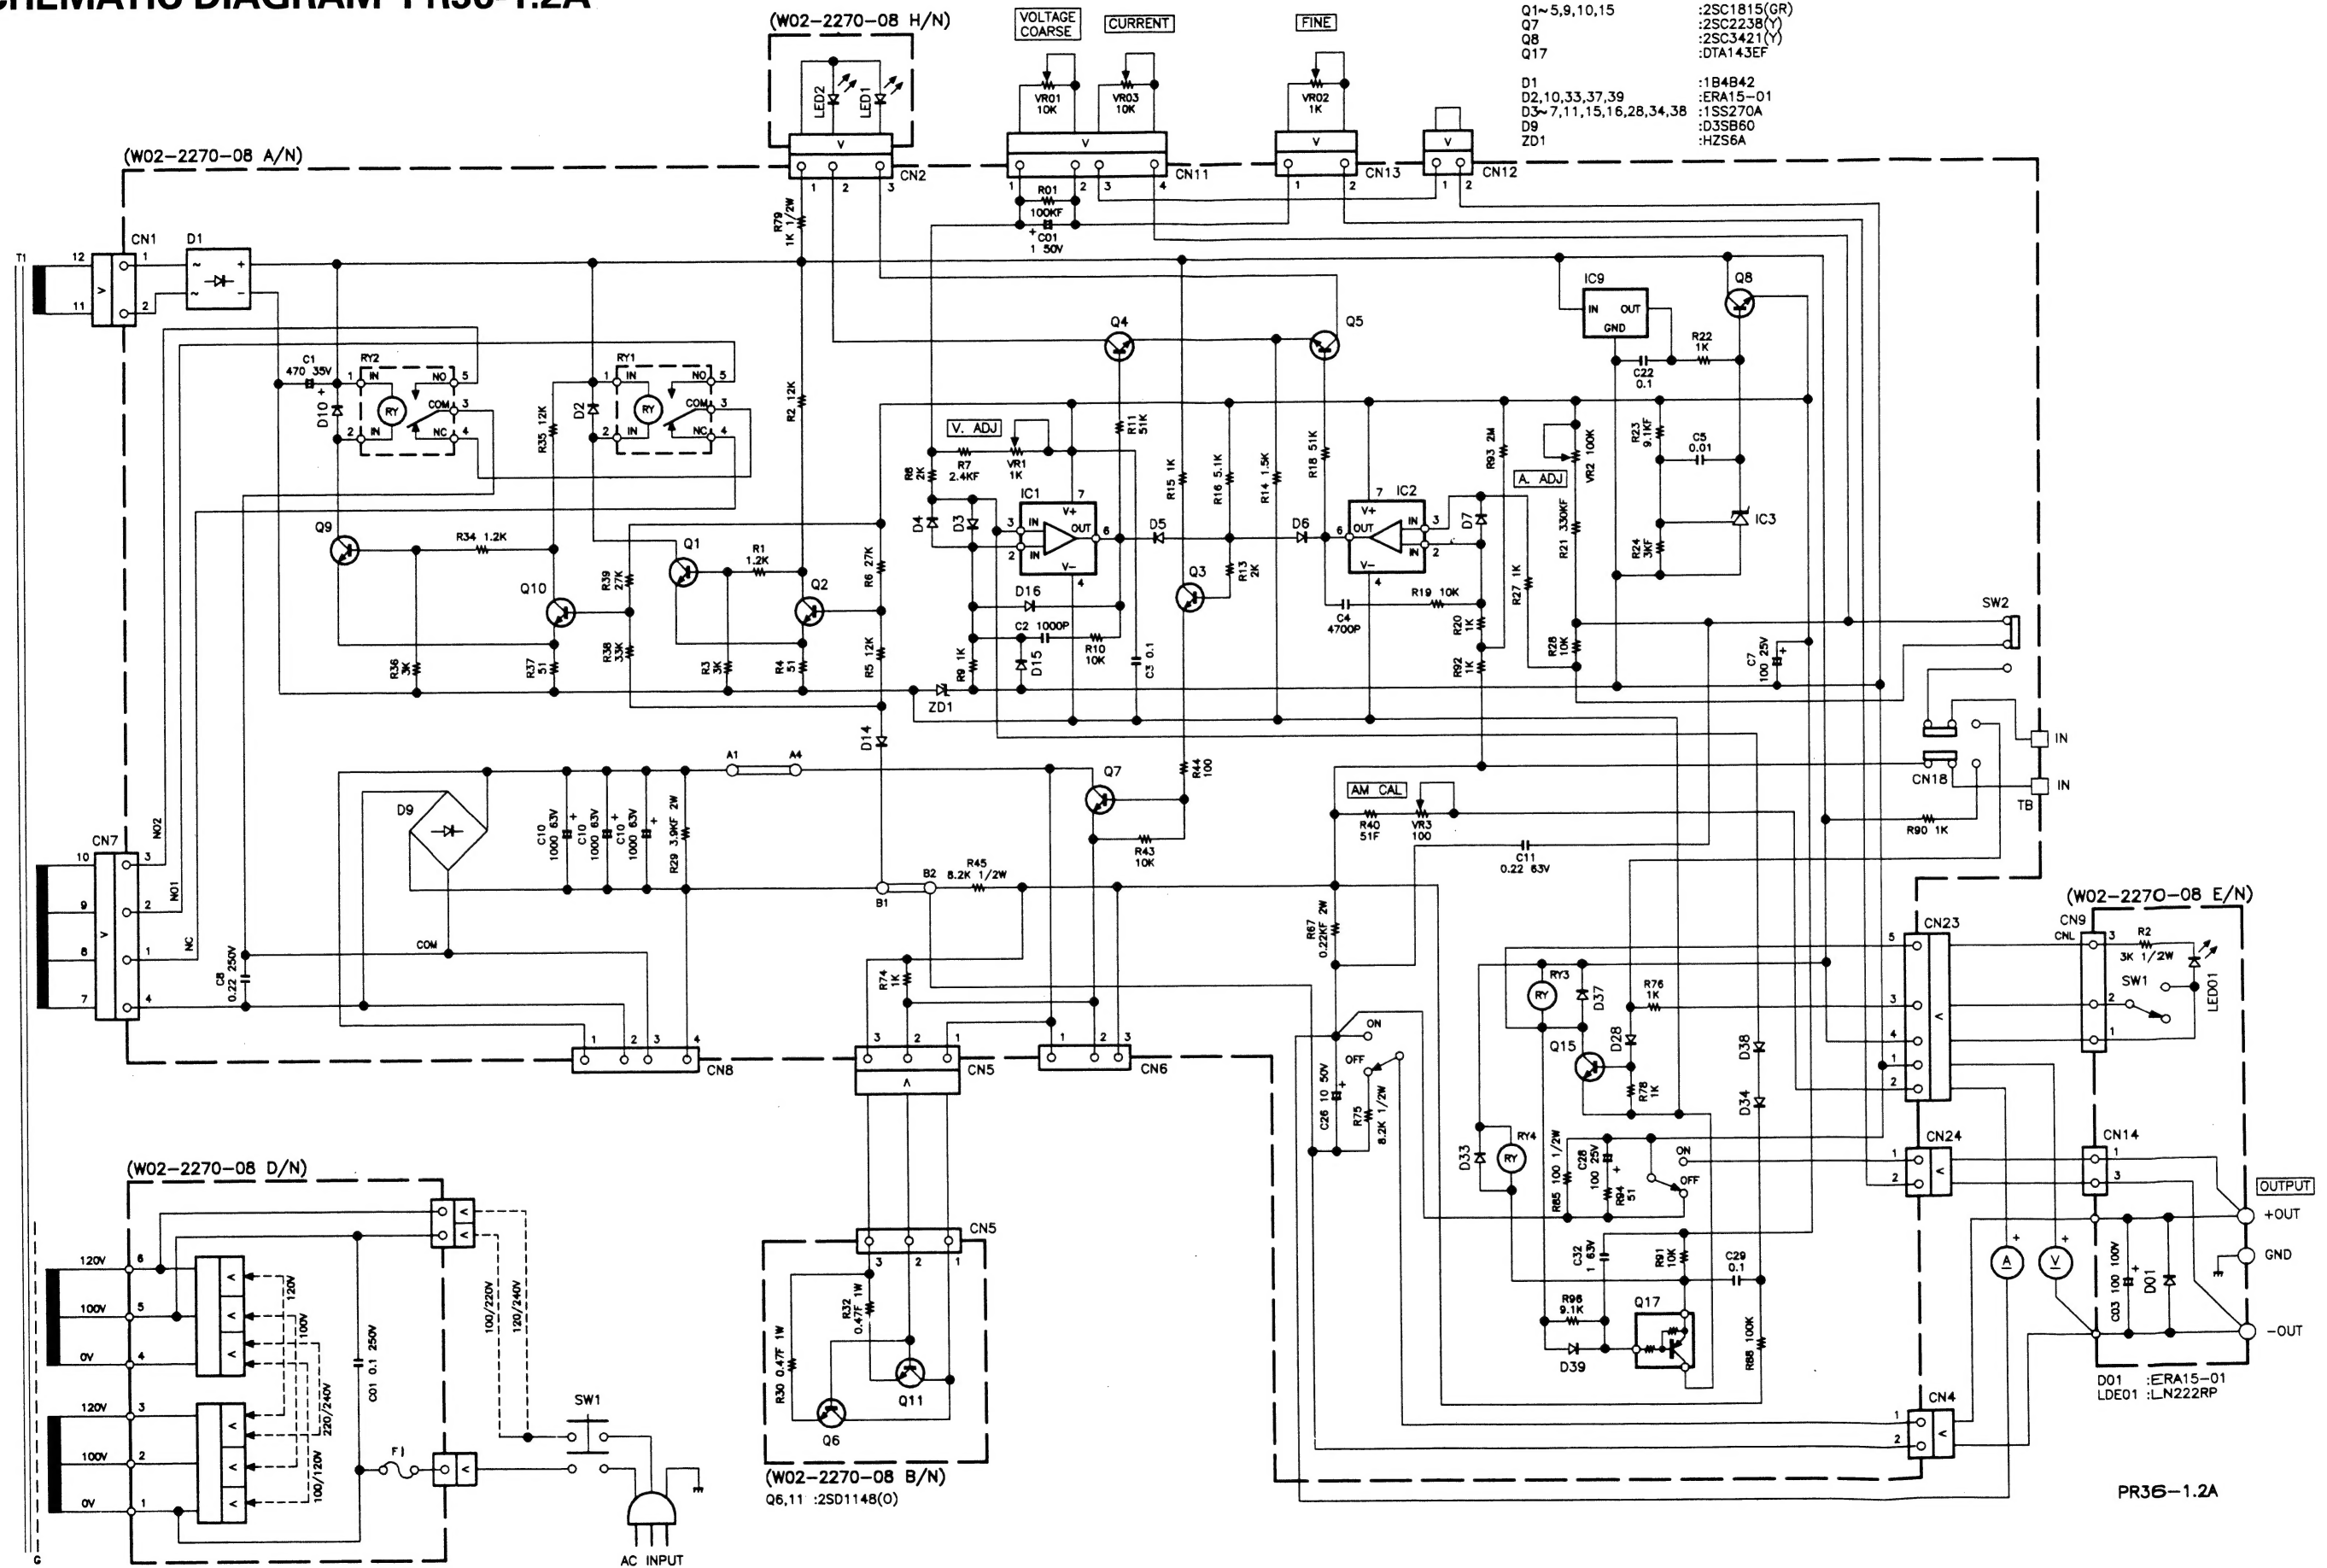


SCHEMATIC DIAGRAM PR36-3A

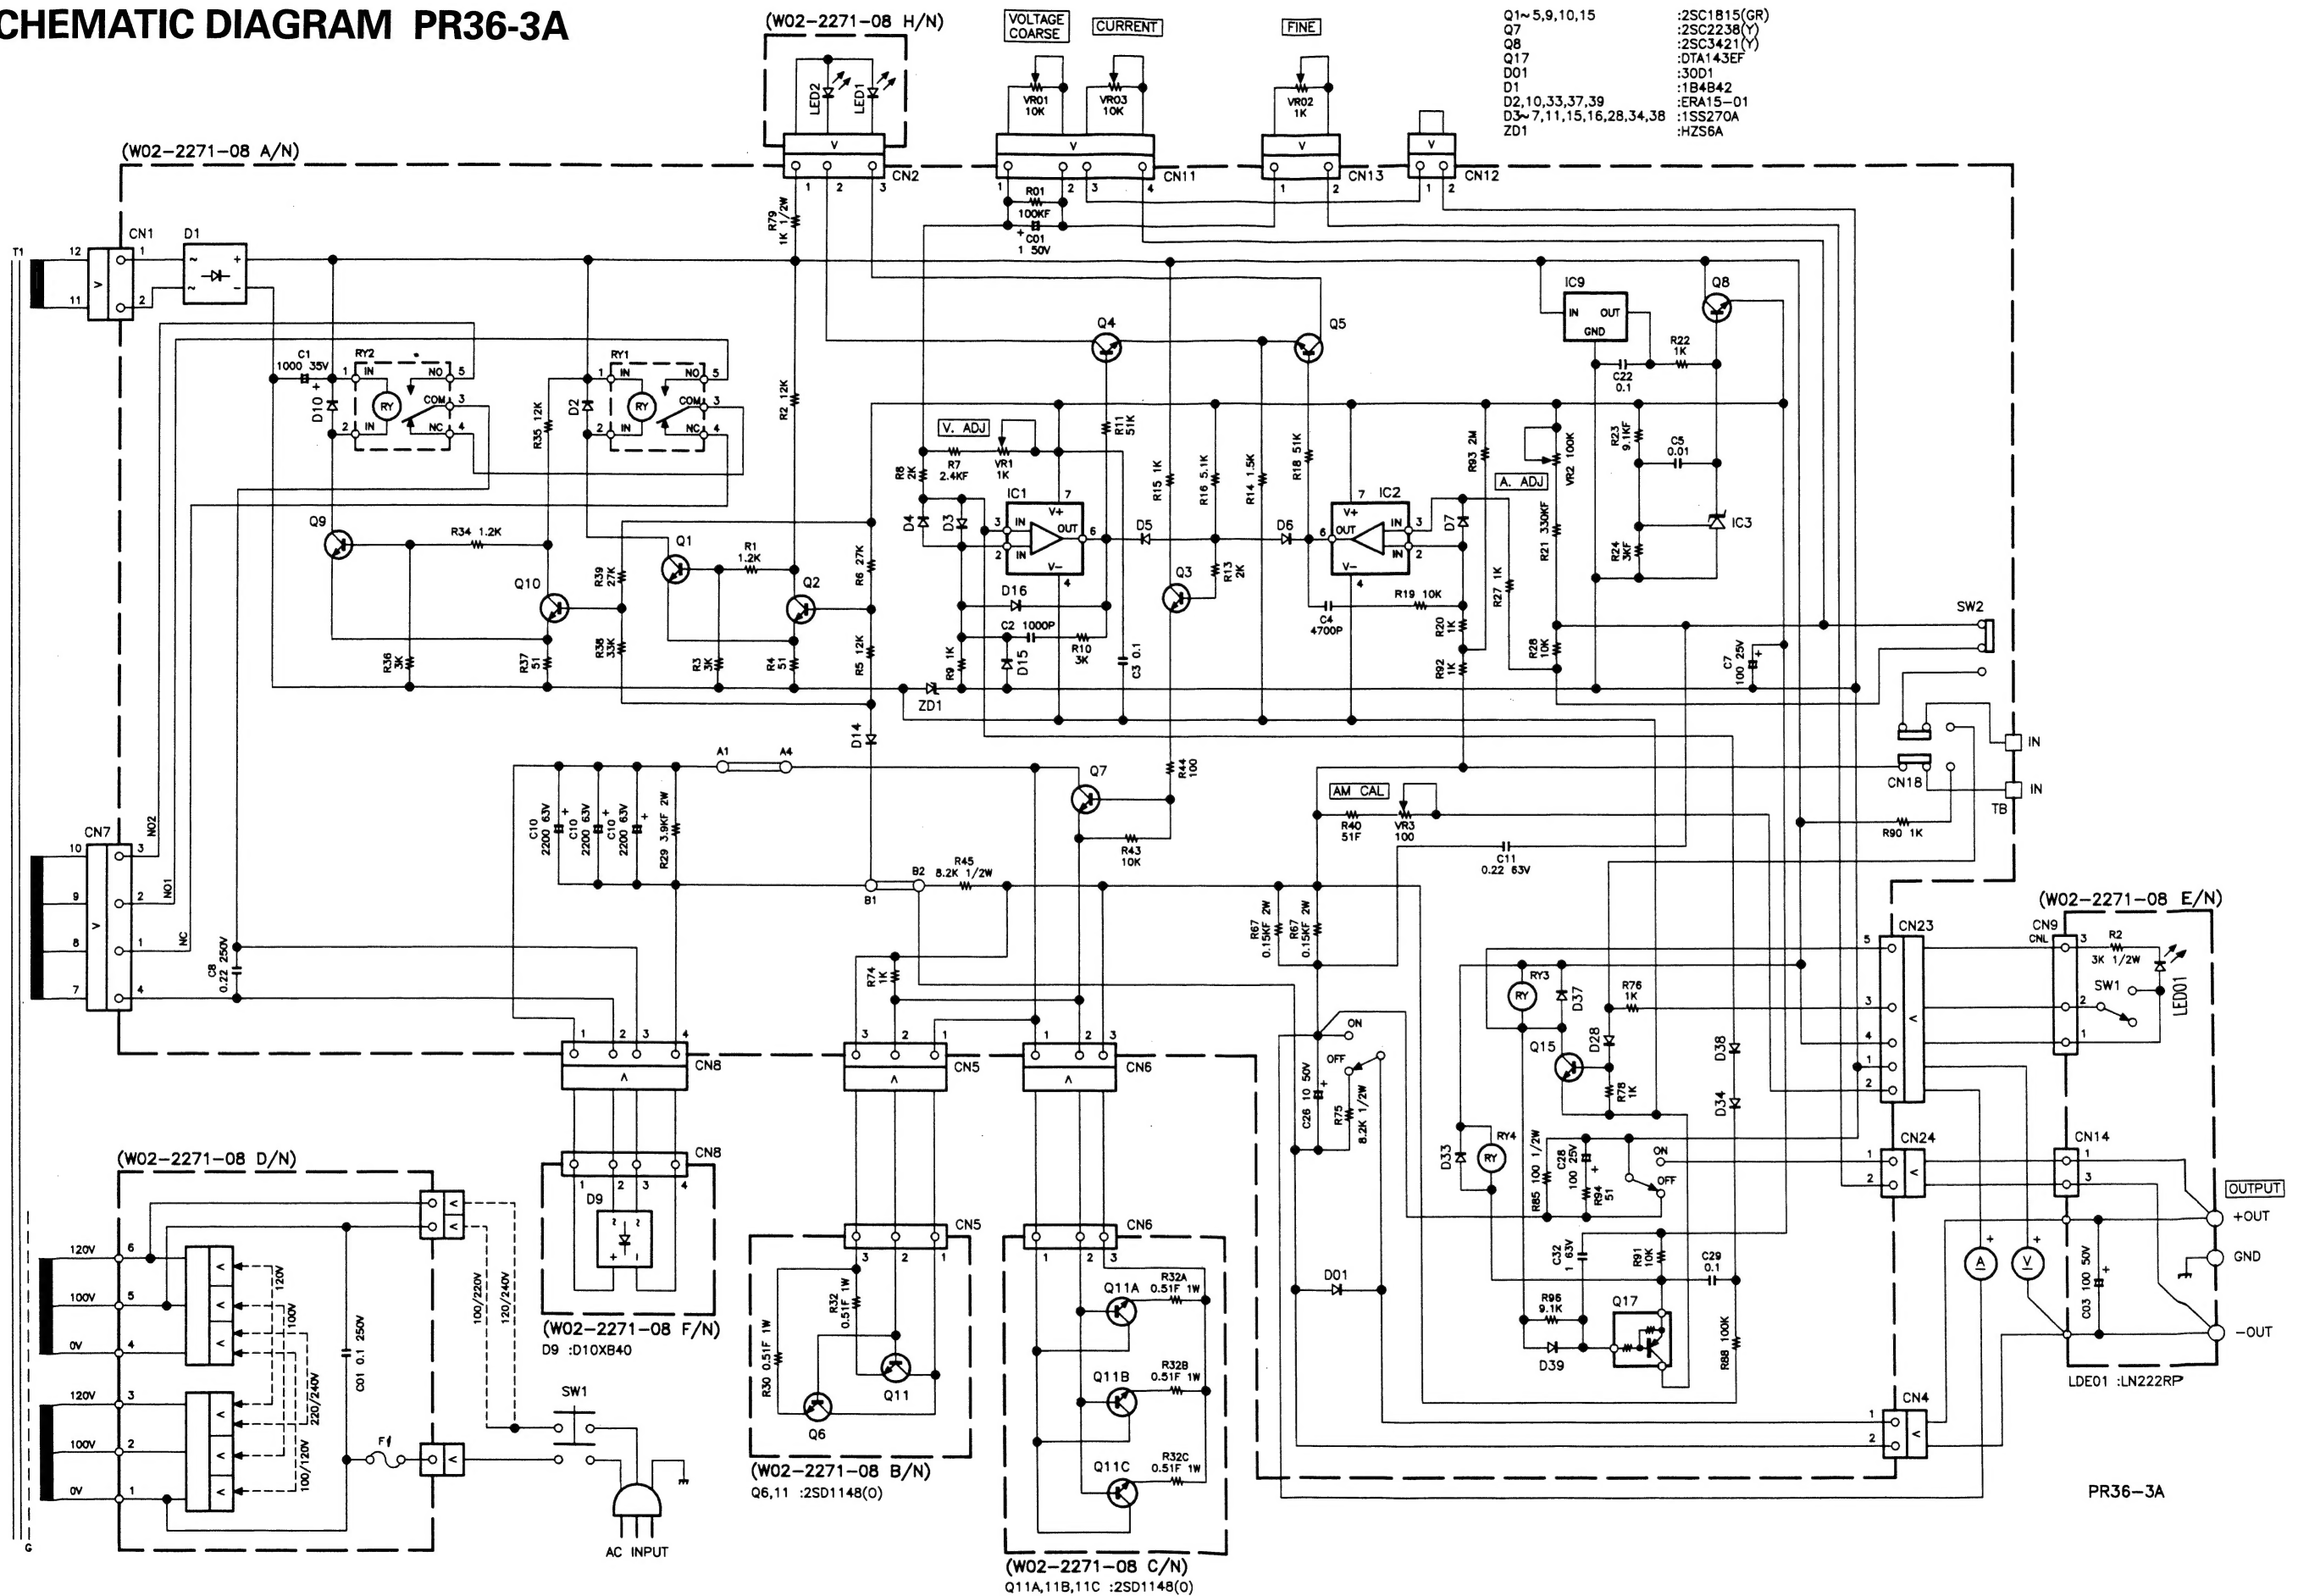


PR36-3A

SCHEMATIC DIAGRAM PR70-1A

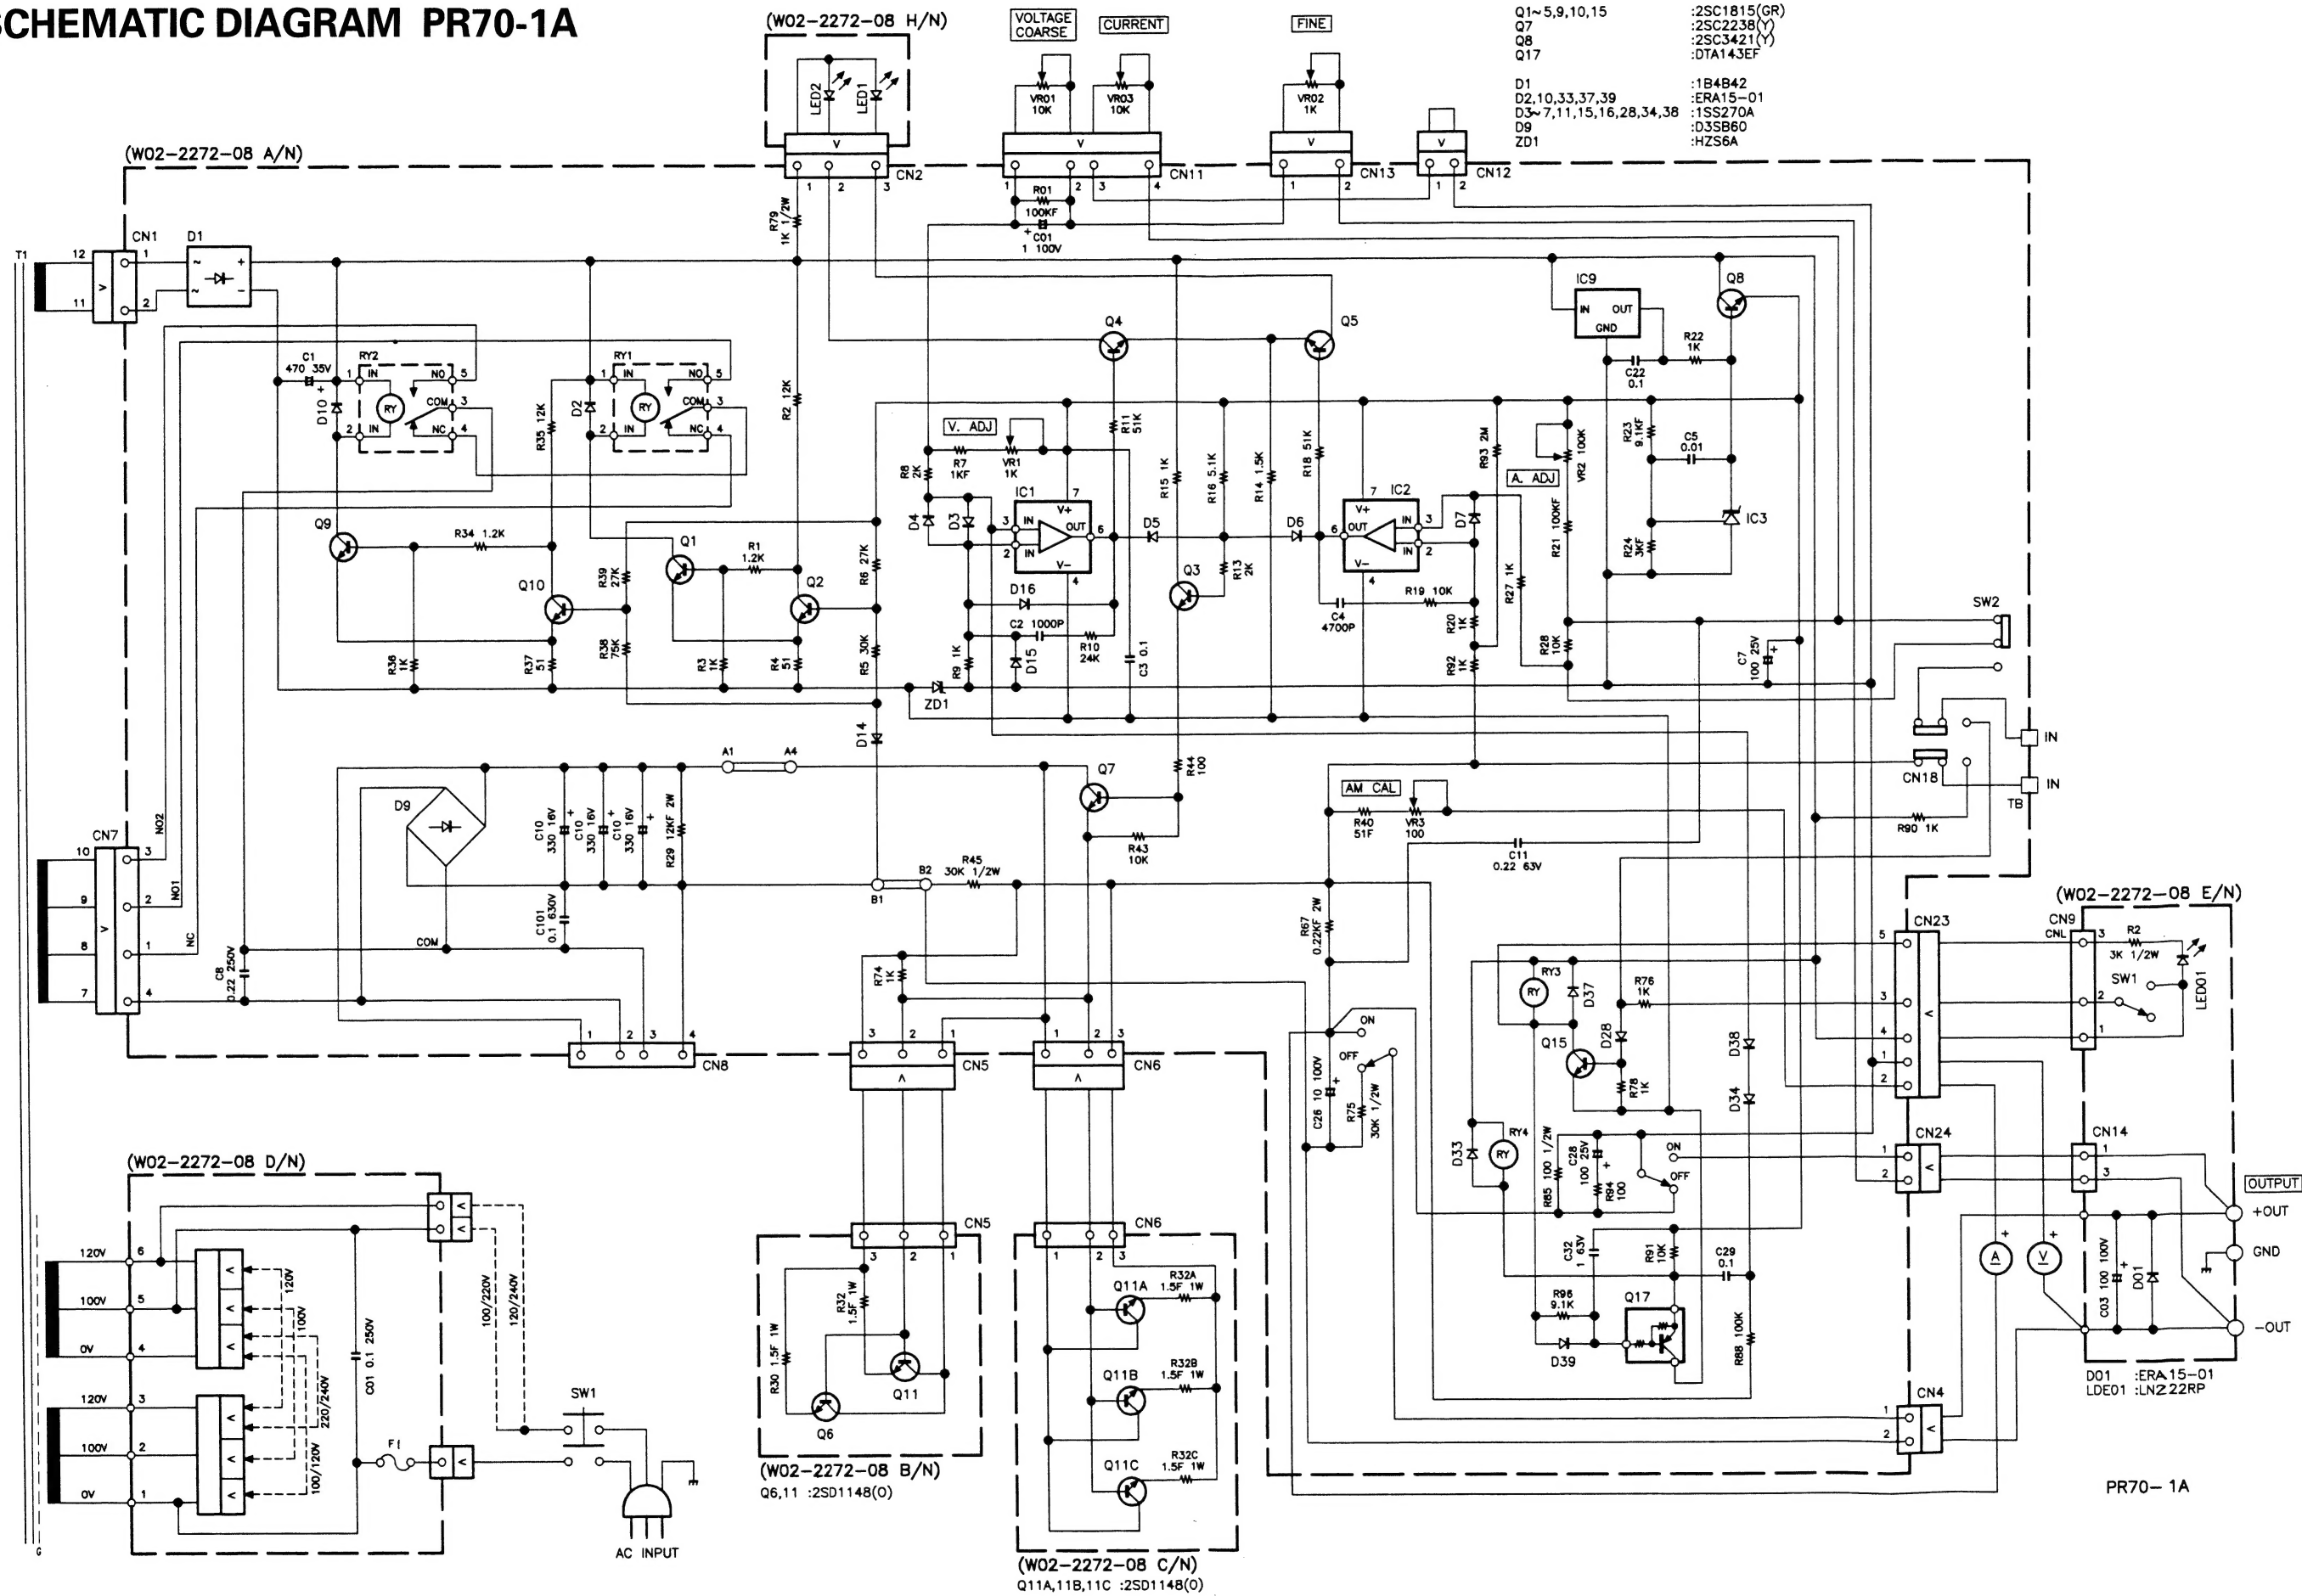


P.C. BOARD


AMP UNIT

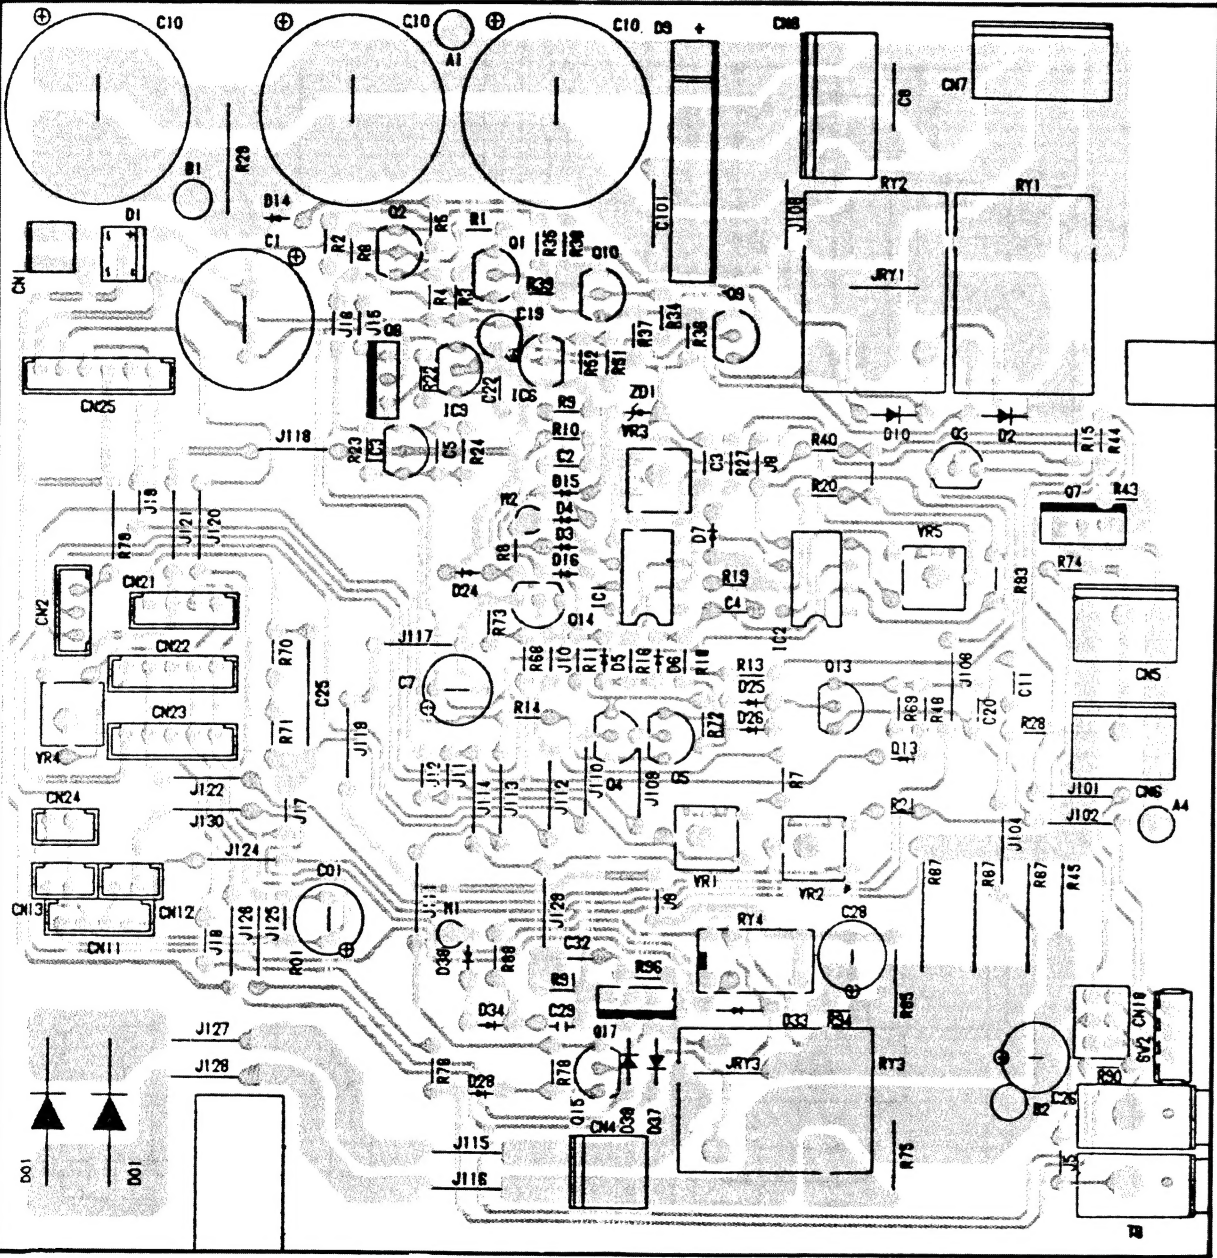


Pattern side view

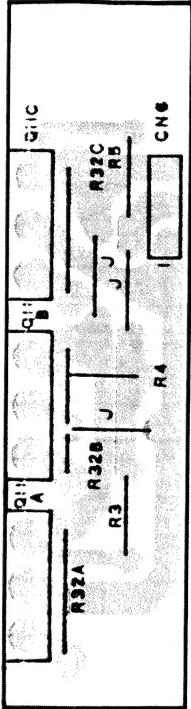

Pattern side view

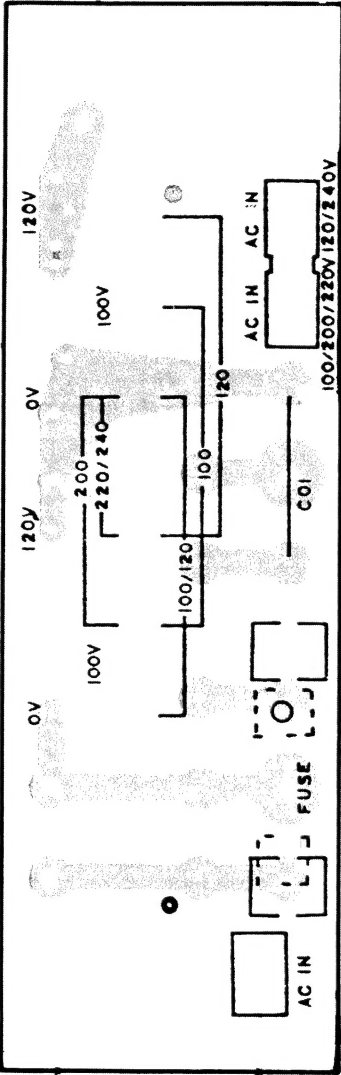

Pattern side view



Pattern side view

Pattern side view

